



P-2030-S

blanket warming cabinet



7.7 ft³ (0.2m³) interior capacity

15 - 20 blankets

- Adjustable temperature setting up to 83°C (180°F)
- Adjustable control with digital display
- Epoxy-coated interior surfaces
- Stainless steel exterior
- Stackable with an identical unit

Specifications:


The single-chambered warming cabinet with 20 gauge stainless steel exterior and door is warmed using a low-heat-density electrothermal cable array mounted against the walls, eliminating the need for a heat circulating fan. The cabinet is equipped with one (1) white, epoxy-coated blanket support assembly and one (1) center shelf. The cabinet is furnished with one (1) set of 3-1/2" (89mm) heavy duty casters, two with locking brake.


Control:

The chamber is controlled by one (1) simple control with on/off power switch, up and down arrow keys with an adjustable temperature range up to 83°C (180°F); indicator light; temperature display key, and digital display.

Special Information:

- Right-hand door swing is standard. Left-hand door is available as a special order.
- When ordering a combination of units to stack:
 - 1.) Order one set of stacking hardware.
 - 2.) Bumper assembly should be ordered for lower unit in stack.

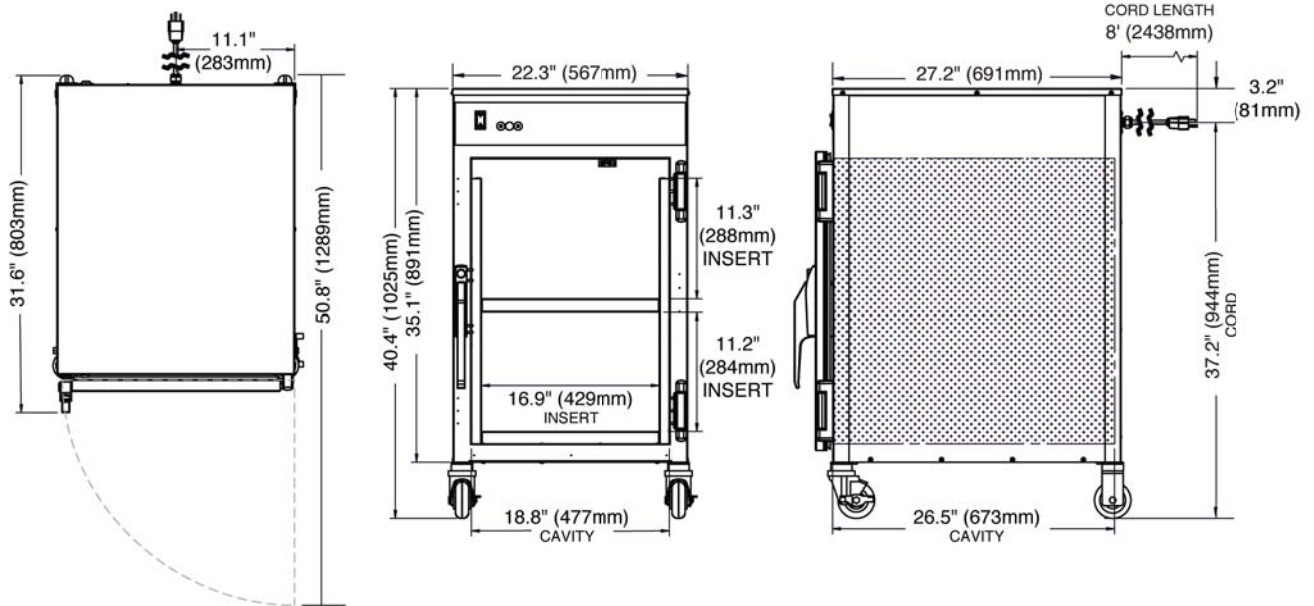

Capacity & Weights	
Interior Capacity	7.7 cubic feet (0.2m ³)
Net Weight	175 lb. (79 kg) est.
Ship Weight	223 lb. (101 kg) est.
Electrical	
120 V.A.C. 60 Hz, 1 ph 960 Watts, 8.0 Amps	 NEMA 5 - 15 P 15A - 125V Plug
Options & Accessories	
Cylinder Lock for Door Handle	0240-00024
Full-Perimeter Rubber Bumper Assembly	0240-00220
Leg Kit, 6" (152mm), Flanged	0240-00221
Stacking Hardware: ** P-2030-S over P-2030-S	0240-00222
** Bumper assembly should be ordered for lower unit in stacking	