

TABLE OF CONTENTS

| CARTS | |
|--|-----------|
| Revolution Case Carts | 2-3 |
| • GEN³ Case Carts | 4-5 |
| Sealed Case Carts | 6-7 |
| CartSTAT | 8 |
| • GEN ³ Open Case | 9 |
| Open Carts - Utility | |
| Open Carts - Central Supply | 11 |
| Open Carts - Distribution | 12-13 |
| Open Carts - Distribution | 12-13 |
| Sterile Processing Cart | 14 |
| Accessories | 15-16 |
| WARMING CARINETO | |
| WARMING CABINETS | 17.00 |
| Blanket & Fluid Warmers | 17-22 |
| STANDS / KICKBUCKETS | |
| Mayo Stands | 23-24 |
| Basin Stands | |
| Kick Buckets | |
| • Hampers | |
| • | _ |
| FOOTSTOOLS | |
| Footstools | 28 |
| IV STANDS | |
| Stainless Steel | 29 |
| • Infusion Pump Stand | |
| Accessories | |
| • Element | |
| | |
| TABLES | |
| • Space Station Two Tier Back Table | |
| Instrument Assembly Station | |
| • Instrument Tables | |
| • Utility Tables | |
| Central Supply Work Tables | 43 |
| Over-Operating Tables | 44 |
| SEATING | |
| Stools and Chairs | 45-52 |
| | |
| NURSERY | 50.51 |
| Bassinets | 53-54 |
| MISCELLANEOUS | |
| Wall Shelves & Operating Room Cabi | nets55-58 |
| Anesthesia and Treatment Cabinets. | |
| | |
| STRETCHERS | . |
| 172 Basic Stretchers | 60-61 |








RCC-242-B

Overall outside dimensions: 461/4"W x 271/2"D x 421/4"H

Usable Interior Space 371/4"W x 233/4"D x 273/4"H

Double door, with scratch and impact resistant clear polycarbonate windows; glass-filled polymer push handles on each end; CartStat biohazard indicator wheel; re • volve™ 6" diameter, maintenance-free, high-temp, engineered thermoplastic casters, two direction and two total lock casters.



The rev • o • lu • tion TM closed case cart is ergonomically designed to be lightweight and easy to handle, requiring less push/ pull force than standard case carts.

Design

- Integrated body, floor and doors increases overall cart rigidity.
- Overall weight of cart reduced.
- Inside floor is sloped 1½° to the rear of cart to contain fluids.
- High temp, impact resistant bumper is mounted directly to the cart body to reduce overall footprint.
- Roll-out shelves with two position latch mechanism safely locks the shelf in or out.
- Cart is designed to quickly drain during cart washing to minimize residual water.





RCC-233-B

Overall outside dimensions: 29"W x 271/2"D x 59"H

Usable Interior Space 20"W x 233/4"D x 443/4"H

Single door, with scratch and impact resistant clear polycarbonate windows; glass-filled polymer push handles on each end; CartStat biohazard indicator wheel; re • volve™ 6" diameter, maintenance-free, high-temp, engineered thermoplastic casters, two direction and two total lock casters.



RCC-235-B

Overall outside dimensions: $36\text{"W} \times 27\frac{1}{2}\text{"D} \times 59\text{"H}$

Usable Interior Space 27"W x 233/4"D x 443/4"H

Double door, with scratch and impact resistant clear polycarbonate windows; glass-filled polymer push handles on each end; CartStat biohazard indicator wheel; re • volve™ 6" diameter, maintenance-free, high-temp, engineered thermoplastic casters, two direction and two total lock casters.



RCC-245-B

Overall outside dimensions: $46\frac{1}{4}$ "W x $27\frac{1}{2}$ "D x 59"H

Usable Interior Space 371/4"W x 233/4"D x 443/4"H

Double door, with scratch and impact resistant clear polycarbonate windows; glass-filled polymer push handles on each end; CartStat biohazard indication wheel; re ● volve™ 6" diameter, maintenance-free, high-temp, engineered thermoplastic casters, two direction and two total lock casters.



RCC-256-MS-B

Overall outside dimensions: 29"W x 271/2"D x 421/4"H

Usable Interior Space 20"W x 23¾"D x 27¾"H

Single door, with scratch and impact resistant clear polycarbonate window; glass-filled polymer push handles on each end; CartStat biohazard indicator wheel; re • volve™ 6" diameter, maintenance-free, high-temp, engineered thermoplastic casters, two direction and two total lock casters.

Shelving Configurations

RCC-333-WS...... Wire shelf, for RCC-233-B and RCC-256-MS-B.

RCC-333-SS...... Solid shelf, for RCC-233-B and RCC-256-MS-B.

RCC-333-WSRO .. Roll-out wire shelf, with (2) position spring loaded shelf lock. Shelf locks in storage and fully extended position for RCC-233-B and RCC-256-MS-B.

RCC-333-SSRO ... Roll-out solid shelf, with (2) position spring loaded shelf lock. Shelf locks in storage and fully

extended position for RCC-233-B and RCC-256-MS-B.

RCC-335-WS...... Wire shelf, for RCC-235-B.

RCC-335-SS...... Solid shelf, for RCC-235-B.

RCC-335-WSRO .. Roll-out wire shelf, with (2) position spring loaded shelf lock. Shelf locks in storage and fully extended position, for RCC-235-B.

RCC-335-SSRO ... Roll-out solid shelf, with (2) position spring loaded shelf lock. Shelf locks in storage and fully extended position, for RCC-235-B.

RCC-342-WS...... Wire shelf, for RCC-242-B and RCC-245-B. **RCC-342-SS**..... Solid shelf, for RCC-242-B and RCC-245-B.

RCC-342-WSRO .. Roll-out wire shelf, with (2) position spring loaded shelf lock. Shelf locks in storage and fully

extended position, for RCC-242-B and RCC-245-B.

RCC-342-SSRO ... Roll-out solid shelf, with (2) position spring loaded shelf lock. Shelf locks in storage and fully extended position, for RCC-242-B and RCC-245-B.









CDS-356-LD shown with optional shelf

CDS-356-LD-B

Overall outside dimensions: $29\frac{1}{2}$ "W × $28\frac{1}{8}$ "D × 30"H
Usable Interior Space 20"W × $24\frac{1}{4}$ "D × $18\frac{1}{4}$ "H

One shelf configuration recommended



CDS-356-MS shown with optional shelf

CDS-356-MS-B

Overall outside dimensions: $29\frac{1}{2}$ "W × $28\frac{1}{8}$ "D × 39"H Usable Interior Space 20"W × $24\frac{1}{4}$ "D × $27\frac{1}{4}$ "H

One shelf configuration recommended

case carts

surgical

features

- Stainless steel construction.
- Integrated body and floor increases overall cart rigidity.
- High temp, impact resistant bumper mounted directly to cart body reducing the overall footprint.
- Cool-Touch polymer handle.
- 6" diameter stainless steel casters.
- Biohazard Indicator Wheel standard.
- CDS-342 and CDS-345 feature two direction lock casters.
- Roll-out shelves with two position latch mechanism safely locks the shelf in or out.
- Cart is designed to quickly drain during cart washing to minimize residual water.













CDS-335 shown with optional shelves

CDS-333-B

Overall outside dimensions: $29\frac{1}{2}$ "W × $28\frac{1}{8}$ "D × 56"H Usable Interior Space 20"W × $24\frac{1}{4}$ "D × $44\frac{1}{4}$ "H

Two shelf configuration recommended

CDS-335-B

Overall outside dimensions: $35\text{"W} \times 32\text{"}4\text{"D} \times 56\text{"H}$ Usable Interior Space $25\text{"}2\text{"W} \times 28\text{"}2\text{"D} \times 44\text{"}4\text{"H}$

Two shelf configuration recommended

CDS-342-B

Overall outside dimensions: 46%"W × 28%"D × 39"H
Usable Interior Space 37%"W × 24%"D × 27%"H

One shelf configuration recommended

CDS-345-B

Overall outside dimensions: 46% "W × 28% "D × 56"H Usable Interior Space 37% "W × 24% "D × 44%"H

Two shelf configuration recommended

Shelving Configurations

CDS-333-SS....... Stainless steel solid shelf for CDS-333, CDS-356-LD and CDS-356-MS.

CDS-333-SSRO ... Stainless steel roll-out solid shelf for CDS-333, CDS-356-LD and CDS-356-MS.

CDS-333-WS....... Stainless steel wire shelf for CDS-333, CDS-356-LD and CDS-356-MS.

CDS-333-WSRO .. Stainless steel roll-out wire shelf for CDS-333, CDS-356-LD and CDS-356-MS.

CDS-335-SS...... Stainless steel solid shelf for CDS-335.

CDS-335-SSRO ... Stainless steel roll-out solid shelf for CDS-335.

CDS-335-WS...... Stainless steel wire shelf for CDS-335.

CDS-335-WSRO .. Stainless steel roll-out wire shelf for CDS-335.

CDS-342-SS....... Stainless steel solid shelf for CDS-342 and CDS-345.

CDS-342-SSRO ... Stainless steel roll-out solid shelf for CDS-342 and CDS-345.

CDS-342-WS...... Stainless steel wire shelf for CDS-342 and CDS-345.

CDS-342-WSRO .. Stainless steel roll-out wire shelf for CDS-342 and CDS-345.

Custom CDS carts engineered to customer specifications available upon request.





SCC-256-MS shown with optional drop leaf

SCC-256-MS

Overall outside dimensions: 285% "W x 285% "D x 397% "H

Usable Interior Space 201/4"W x 24"D x 261/4"H

One shelf configuration recommended


sealed carts

surgical

features

Sealed Case Carts features a full seal around the door perimeter and center stop providing an added level of protection against dust and debris.

- Fully-welded all stainless steel construction
- Exterior push handles for better control and more interior space
- One-piece continuous wrap-around bumper, non-marring
- Sound-deadened tops and doors for quiet operation
- Positive lock door latches
- All carts can be manufactured to individual specifications

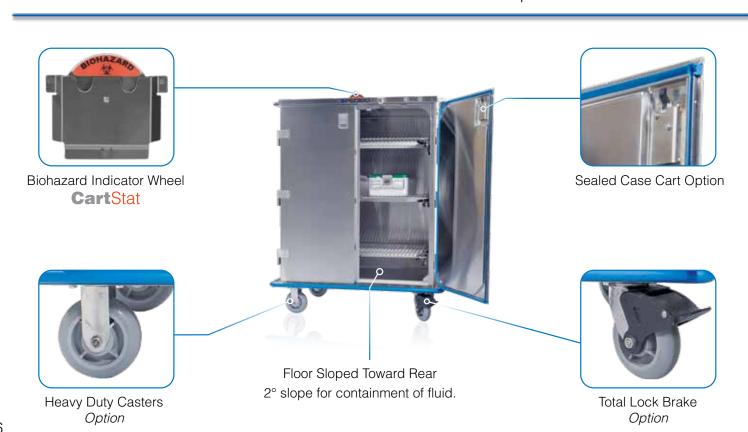





Overall outside dimensions: 285/8"W x 285/8"D x 567/8"H **Usable Interior Space** 201/4"W x 24"D x 431/4"H

Two shelf configuration recommended



Shown with optional shelves & CartStat

SCC-235

Overall outside dimensions: 341/8"W x 323/8"D x 567/8"H **Usable Interior Space**

Two shelf configuration recommended

25¾"W x 27¾"D x 43¼"H



Shown with optional shelf

SCC-245

Overall outside dimensions: 45%"W x 285%"D x 56%"H **Usable Interior Space**

Shown with optional shelves

371/2"W x 24"D x 431/4"H

Two shelf configuration recommended

SCC-242

Overall outside dimensions: 45%"W x 28%"D x 39%"H Usable Interior Space

One shelf configuration recommended

371/2"W x 24"D x 261/4"H

OPTIONAL FEATURES

- Security Latch
- Barcode Plate Holder
- Heavy Duty 6" x 2" Casters
 8½" x 11" Card Holder
- Color Identification Wheel

Shelving Configurations

CDS-233-SS....... Stainless steel solid shelf for CDS-233, CDS-256-LD and CDS-256-MS.

CDS-233-SSRO ... Stainless steel roll-out solid shelf for CDS-233, CDS-256-LD and CDS-256-MS.

CDS-233-WS....... Stainless steel wire shelf for CDS-233, CDS-256-LD and CDS-256-MS.

CDS-233-WSRO .. Stainless steel roll-out wire shelf for CDS-233, CDS-256-LD and CDS-256-MS.

CDS-235-SS...... Stainless steel solid shelf for CDS-235.

CDS-235-SSRO ... Stainless steel roll-out solid shelf for CDS-235.

CDS-235-WS...... Stainless steel wire shelf for CDS-235.

CDS-235-WSRO .. Stainless steel roll-out wire shelf for CDS-235.

CDS-242-SS....... Stainless steel solid shelf for CDS-242 and CDS-245.

CDS-242-SSRO ... Stainless steel roll-out solid shelf for CDS-242 and CDS-245.

CDS-242-WS...... Stainless steel wire shelf for CDS-242 and CDS-245.

CDS-242-WSRO .. Stainless steel roll-out wire shelf for CDS-242 and CDS-245.

Custom SCC carts engineered to customer specifications available upon request.





CartStat

Ensure safe transport and compliance

- Designed for compliance with OSHA standard CFR 1910.1030, ANSI/AAMI ST 79.
- Clearly communicate the contents and destination of the cart - supports staff safety and sterility.
- CartStat wheel mounts directly on the cart so you always provide safe transportation of instruments.

Options:

Biohazard Indicators

- RCC-BH
- CDS-BH







CartStat

Clearly communicate the contents and destination of the cart - supports staff safety and sterility. Designed for compliance with OSHA standard CFR 1910.1030, ANSI/AAMI ST 79.





Biohazard Indicator Wheel











cart shown with optional wire back and shelves

CDS-362 Procedure Cart

Overall Size

29%"W x 29%"D x 651/2"H

- Designed to be used as a surgical or obstetrical case cart
- Shelves adjustable on four inch spacing intervals
- Multi-purpose cart can also be used as a linen cart or as a clean/dirty utility cart

Weight Capacity:

| Individual Shelf | 150 | lbs |
|------------------|-----|-----|
| Bottom Shelf | 200 | lbs |

Maximum Cart Capacity ... 600 lbs.



CDS-353 Cart

Overall Size

35%"W x 26%"D x 361/2"H

- Equipped with rails on the all three surfaces
- Adjustable stainless steel center shelf (Three levels with 5½" intervals)

Weight Capacity:

| Top Shelf | 150 | lbs |
|--------------|-----|-----|
| Middle Shelf | 150 | lbs |
| Bottom Shelf | 200 | lbs |

Maximum Cart Capacity ... 500 lbs.

open case carts

features

- All welded stainless steel construction for one single piece frame
- Frame tubing is 11/4" 18 gauge stainless steel
- Bolt-on bumper system for easy cleaning and replacement
- 6" stainless steel casters
- Solid stainless steel 16 gauge bottom

• Options:

Wire backing (2" x 3" or 4" x 6" configuration)





CDS-353-HD Heavy-Duty Utility Cart

Overall Size

35%"W x 261%"D x 45"H

Weight Capacity:

Top 250 lbs. Middle 250 lbs. Bottom 400 lbs.

Maximum Load 900 lbs.

optional brake casters available



CDS-145 Utility Cart

Overall Size

411/2"W x 233/8"D x 381/4"H

Weight Capacity:

Top 50 lbs. Middle 50 lbs. Bottom 100 lbs.

Maximum Load 200 lbs.

5" stainless steel plated casters

CDS-140 Light Weight Utility Cart

Overall Size

271/2"W x 181/8"D x 40"H

Weight Capacity:

Top 25 lbs. Middle 25 lbs. Bottom 50 lbs.

Maximum Load 100 lbs.

4" nickel plated casters

open carts

features

- All welded stainless steel construction for one single piece frame
- Easy to clean
- Strong, fully welded construction





CDS-140-B Light Weight Utility Cart

Overall Size

271/2"W x 181/8"D x 40"H

Weight Capacity:

Top 25 lbs. Middle 25 lbs. Bottom 50 lbs.

Maximum Load 100 lbs.

4" nickel plated casters 5" rolling bumpers





CDS-377 Central Supply Cart

Overall Size

551/2"W x 261/8"D x 531/2"H

Includes seven 5" deep tote boxes (standard), or up to three large 10" deep tote boxes

Weight Capacity:

Individual Shelf......100 lbs. (option) Bottom.....200 lbs.

Maximum Cart Capacity ... 600 lbs.



CDS-378 Central Supply Cart

Overall Size

66¾"W x 261/8"D x 651/2"H

Includes nine 5" deep tote boxes (standard), or up to four large 10" deep tote boxes

Weight Capacity:

Individual Shelf......100 lbs. (option) Bottom.....200 lbs.

Maximum Cart Capacity ... 600 lbs.

open carts

features

- All welded stainless steel construction for one single piece frame
- Plate-mounted 6" stainless steel casters with two diagonal swivel locks to provide steering stability
- Bolt-on bumper system for easy cleaning and replacement

• Options:

Wire or solid shelving, dividers, tote boxes, caster upgrade and wire backing (2" x 3" or 4" x 6" configuration)



CDS-378 cart shown with optional accessories



CDS-347-A Distribution Cart

Overall Size

50%"W x 26%"D x 651/2"H

• Designed to be used as a clean/dirty linen cart or as a large utility cart.

Weight Capacity:

Maximum Cart Capacity ... 425 lbs.



CDS-347 Distribution Cart

Overall Size

39%"W x 26%"D x $41\frac{1}{2}$ "H

• Ideal for case cart systems or general floor use.

Weight Capacity:

Individual Shelf......75 lbs. (option) Bottom.....200 lbs.

Maximum Cart Capacity ... 425 lbs.

open carts

features

- All welded stainless steel construction for one single piece frame
- Frame tubing is 11/4" 18 gauge stainless steel
- Bolt-on bumper system for easy cleaning and replacement
- Shelves adjustable on four inch spacing intervals
- Plate-mounted 6" stainless steel casters
- Solid 16 gauge stainless steel bottom

• Options:

Wire or solid shelving, dividers, tote boxes, caster upgrades, and wire backing (2" x 3" or 4" x 6" configuration)









CDS-348-A Distribution Cart

Overall Size

50%"W x 261/8"D x 651/2"H

 Designed to be used as a clean/dirty linen cart or as a large utility cart

Weight Capacity:

Maximum Cart Capacity ... 600 lbs.

open carts

features

- All welded stainless steel construction for one single piece frame
- Frame tubing is 1½" 18 gauge stainless steel
- Bolt-on bumper system for easy cleaning and replacement
- Shelves adjustable on 4 inch spacing intervals
- Plate-mounted 6" stainless steel casters with two diagonal swivel locks to provide steering stability
- Solid 16 gauge stainless steel bottom

• Options:

Wire or solid shelving, dividers, tote boxes, caster upgrades, and wire backing (2" x 3" or 4" x 6" configuration)



CDS-348 General Utility Cart

Overall Size

50%"W x 26%"D x 53%"H

• Suitable for general floor service, pharmacy or linen

Weight Capacity:

Maximum Cart Capacity ... 600 lbs.



CDS-349 General Utility Cart

Overall Size

60%"W x 261/8"D x 651/2"H

• Ideal cart for linen distribution, storage and floor nursing stations

Weight Capacity:

Maximum Cart Capacity ... 600 lbs.





CDS-349 cart shown with optional accessories



shown with hospital accessories

CDS-160 Instrument Container Wash Cart

Overall Size

49"W x 26"D x 67"H

Weight Capacity:

Shelf............ 80 lbs. Bottom........ 120 lbs.

Maximum Cart Capacity ... 360 lbs.



shown with optional stainless steel wire shelves

CDS-151 Sterilizer Cart

Overall Size

 $37\frac{3}{4}$ "W x $24\frac{1}{2}$ "D x $55\frac{3}{8}$ "H (includes bumpers)

sterile processing

equipment

features

- Stainless steel construction
- Fully cart-washable
- Fully welded frame
- Donut bumpers on legs
- 5" diameter stainless steel swivel casters
- Five stainless steel wire shelves
- Six adjustable container lid dividers

Options:

- Wrap hangers measure 56"W x 30½"H
- Full length lower shelf
- Tote box drawers: 5" or 10" deep
- Stainless steel drawers:
 15½"W x 12½"D x 3½"H (installed, complete)
- 4" diameter swivel casters with brakes

sterilizer cart

An excellent cart for autoclaves due to single piece, all welded stainless steel construction

features

- Fully-welded seams
- Heavy-duty 11/4" diameter tubular frame
- 5" high temperature stainless steel swivel plate casters for smooth mobility
- High temperature corner bumpers
- Open wire bottom for improved steam circulation
- 17½" center-to-center caster spacing




open cart accessories



Shelf Dividers

- Adjustable
- Stainless steel construction for durability and ease of maintenance
- Available for solid or wire shelves in 6" or 10" height



Retaining Rails

- Retaining rails to prevent accidental loss of materials
- Easily attached or removed
- Sound deadening rubber
- Polished stainless steel (5/16" diameter)




Wire Shelves

- Electro-polished stainless
- Easy to adjust or remove
- 3/16" diameter wire welded to 1/4" diameter wire support
- Maximum opening between rods: 1" x 83/4"



Solid Shelves

- Steril-Gard construction
- Easy to adjust or remove
- 18-gauge stainless steel



5" Tote Box Drawers

- · Constructed of impactresistant, high-density polyethylene for durability
- Optional short or long tote box dividers available

DIMENSIONS:

1734"L x 141/2"W x 51/8"D



Tote mounted with hanger

10" Tote Box Drawers

- · Constructed of impactresistant, high-density polyethylene for durability
- Optional short or long tote box dividers available

DIMENSIONS:

17¾"L x 14½"W x 10"D

Tote Box Hangers

· Hangs below both wire or solid shelving



Stainless Steel Caster

Stainless Steel Casters

- · Recommended for carts that are cart washed
- All stainless steel material and bearings for a rust-free caster
- Two lubrication points for ease of maintenance



Swivel Lock

- Used for improved steering
- Recommended for long carts to assist in navigating long corridors
- Disengage swivel lock for maneuverability in tight spaces
- · Easy foot operation



Heavy-Duty Covers

- · Heavy duty, anti-bacterial STAPH-CHEK™ covers protect cart and its cargo
- Flame-resistant
- Clear vinyl front with heavyduty nylon zippers or Velcro closures
- Hand clean with soap and warm water ONLY. Do not launder.



Disposable Cart Covers

- · Heavy, clear plastic material
- Can serve as a trash bag after completion of the procedure
- · Packed on convenient rolls
- Economical, single-use alternative to washable covers



Wire Backs

- Electro-polished stainless
- 3/16" diameter vertical wires. welded to 1/4" diameter horizontal rods
- Choice of 2" x 3" or 4" x 6" openings



Automatic Couplers

- Cart couplers are available for installation on all open
- · Compatible with any major elevator or cart washer with automatic cart pickup system

closed cart accessories



Drop Leaf Shelves

- Extends top of cart to increase work surface area
- Drain holes at end of leaf
- Features Safety Release Leaf Lock Button



High Temp Caster

- · Maintenance-free caster
- Recommended for high temp cart wash environments
- Precision sealed stainless steel swivel & wheel bearings
- High-temp rubber tread donut shaped wheel



Swivel Lock

- Used for improved steering
- Recommended for long carts to assist in navigating long corridors
- Disengage swivel lock for maneuverability in tight spaces
- Easy foot operation



Stainless Steel Caster

Stainless Steel Casters

- Recommended for high temp cart wash environments
- All stainless steel material and bearings for a rust-free caster
- Two lubrication points for ease of maintenance











Automatic Couplers

- Cart couplers are available for installation on all closed carts
- Compatible with any major elevator or cart washer with automatic cart pick up system

Wire Shelves

- · Stainless steel
- Easy to adjust or remove
- 3/16" diameter wire welded to 5/16" diameter wire support rods
- Maximum opening between rods: 1⁵/₁₆" x 7¹¹/₁₆"

Solid Shelves

- Steril-Gard construction •
- Easy to adjust or remove
- 18-gauge stainless steel

Card Holder

- Standard card sizes include:
 - ° 4" x 6"
 - ° 5" x 7"
 - ° 8½" x 11"
- Available in any size or orientation to suit individual needs

Cart ID Systems

- For easy cart identification
- High-visibility Lexan material
- Cart washable
- Custom labels available upon request (5/16" diameter)



CartStat

- CartStat wheel mounts
 directly on the cart.
- Designed for compliance
 with OSHA standard
 CFR 1910.1030, ANSI/
 AAMI ST 79.
- May be mounted in the field.



Exterior Security Latch

- Prevents unintentional opening of cart doors
- Available with hole to fit customer provided tamper proof tags



Security Paddle Latch

- Easy to add in field no
 drilling required
- Flush mount does not extend beyond door face
- Integrated to paddle latch



Tote Box Drawers

- Constructed of impactresistant high density polyethylene for durability
- Available in 5" or 10" sizes
- Optional short or long tote box dividers available to section drawer into smaller compartments



Tote Box Hangers

- Stainless steel hangers hold totes below top of the cart
- Attaches to either wire or solid shelving









P-2420

OVERALL SIZE

30"W x 21.12"D x 25.12"H

COMPARTMENT SIZE

- 4.75 cubic ft.
- 26.5"W x 17"D x 18.25"H

tri▼mode Range:

Irrigation: 90°F - 150°F Injection: 90°F - 104°F Blanket: 90°F - 160°F

· Total Capacity:

- o 20 1-liter bags or
- o 24 1-liter bottles
- o 14 18 blankets
- Data Logger (Option)
- Caster (Option)

trivmode



P-2430

OVERALL SIZE

30"W x 28.5"D x 25.12"H

COMPARTMENT SIZE

- 5.5 cubic ft.
- 26.5"W x 19.75"D x 18.25"H

• trivmode Range:

Irrigation: 90°F - 150°F o Injection: 90°F - 104°F Blanket: 90°F - 160°F

· Total Capacity:

- o 48 1-liter bags or
- o 30 1-liter bottles
- o 16 20 blankets
- Data Logger (Option)
- Caster (Option)

warming cabinets

blanket & fluid

features

Combination warmers feature tri-temp chamber allowing for 3 different modes of warming, LED display, window doors, and control lock programming.





P-2010-S

OVERALL SIZE

16.5"W x 25.25"D x 21.5"H

COMPARTMENT SIZE

- 2.3 cubic ft.
- 13.25"W x 21.25"D x 14"H

OVERALL SIZE

18.5"W x 23.5"D x 22"H

COMPARTMENT SIZE

• 2.5 cubic ft.

Temp Range:

O Blanket:

Total Capacity:

o 4-6 blankets

P-2012

• 15.5"W x 18.75"D x 15.25"H

90°F - 160°F



P-2022

OVERALL SIZE

18.5"W x 23.5"D x 28"H 18.5"W x 23.5"D x 34.5"H (with casters

COMPARTMENT SIZE

- 3.5 cubic ft.
- 15.5"W x 18.75"D x 21.25"H* * (9.56"H above and below the center shelf)

• Temp Range:

O Blanket: 90°F - 160°F

Total Capacity:

o 10 - 12 blankets

Caster (Option)

OVERALL SIZE

P-2032

shown with left door

hidge mount option

24"W x 25.75"D x 35"H $24"W \times 25.75"D \times 42"H$ (with casters)

COMPARTMENT SIZE

- 7.5 cubic ft.
- 21"W x 21.75"D x 28.25"H * (13.18"H above and below the centershelf)



o Blanket: 90°F - 160°F

 Total Capacity: 20 - 25 blankets

Caster (Option)

 Total Capacity: 5 - 7 blankets

• Temp Range:

Blankets:

• Caster (Option)

98°F - 200°F

• Caster (Option)



P-2040

OVERALL SIZE (without bumper)

22.25"W x 32.5"D x 72.75"H

COMPARTMENT SIZE

- 7.7 cubic ft. upper
- 19"W x 26.5"D x 26.75"H
- 7.7 cubic ft. lower
- 19"W x 26.25"D x 26.75"H

• Temp Range:

Blankets: 98°F - 160°F
 Irrigation: 90°F - 150°F

· Total Capacity:

- o 60 1-liter bottles
- 40-50 blankets
- Two compartments, each with individual controls
- 5" casters
- Bumper (Option)

warming cabinets

blanket & fluid

features

Combination fluid and blanket warmers feature LED display, window doors, and control lock programming.

- No fans or lint traps
- Two compartments, each with individual controls





P-2147

OVERALL SIZE

- 30"W x 28.5"D x 75"H (caster standard)
- 30"W x 28.5"D x 68"H (feet - option)

COMPARTMENT SIZE

- 3.7 cu. ft. fluid compartment
- 26.5"W x 23.75"D x 15"H
- 9 cu. ft. blanket compartment •
- 26.5"W x 23.75"D x 36"H

tri▼mode Range:

- o Blankets: 90°F 160°F
- Irrigation: 90°F 150°F
- o Injection: 90°F 104°F

Total Capacity:

- 24 1-liter bags
- o 30 1-liter bottles
- o 10-14 blankets (upper chamber)
- 30-40 blankets (lower chamber)
- Separate temperature controls for each compartment
- (trivmode top chamber only)
- Two compartments with two separate doors
- 5" casters
- Data Logger





P-2150

OVERALL SIZE

• 30"W x21.25"D x 75"H

COMPARTMENT SIZE

- 3.7 cu. ft. fluid compartment
- 26.5"W x 17"D x 15"H
- 13.3 cu. ft. blanket compartment
- 26.5"W x 17"D x 36"H

• trivmode Range:

- Blankets: 90°F 160°F
 Irrigation: 90°F 150°F
- o Injection: 90°F 104°F

Total Capacity:

- o 20 1-liter bags
- o 24 1-liter bottles
- o 9-12 blankets (upper chamber)
- o 24-30 blankets (lower chamber)
- Separate temperature controls for each compartment (trivmode top chamber only)
- Two compartments with two separate doors
- Pass Through (Option)
- Data Logger (Option)



warming cabinets

blanket

P-2055

OVERALL SIZE

32"W x 29.25"D x 71"H

COMPARTMENT SIZE

- 10.3 cubic ft. upper
- 26.5"W x 23.75"D x 28.37"H
- 10.3 cubic ft. lower
- 26.5"W x 23.75"D x 28.37"H

- Temp Range:
- O Blankets:
- 98°F 160°F
- Total Capacity: 60-70 blankets
- Circulation fan for even temperature
- 5" casters

features

Elite Series blanket warmers feature windowed door, programmable control with temperature lock and four digit LED One compartment, two separate doors

display and single pane energy efficient coated glass window door inventory observation.



Heated center shelf



P-2210

OVERALL SIZE

18.5"W x 22"D x 22"H

COMPARTMENT SIZE

- 2.5 cubic ft.
- 15.5"W x 18.75"D x 15.25"H
- Temp Range:
 - O Blankets:

90°F - 160°F

- A warming shut-off system, separate from the electronic control, prevents overheating
- Interior blue lighting
- No fans or lint traps



P-2220

OVERALL SIZE

• 18.5"W x22"D x 28"H

COMPARTMENT SIZE

- 3.5 cubic ft.
- 15.5"W x 18.75"D x 21.25"H* * (9.56"H above & below the center shelf)
- Temp Range:

O Blankets:

90°F - 160°F

- A warming shut-off system, separate from the electronic control, prevents overheating
- Interior blue lighting
- No fans or lint traps

Heated center shelf



P-2230

OVERALL SIZE

• 24"W x 24.5"D x 22"H

COMPARTMENT SIZE

- 4 cubic ft.
- 21"W x 21.75"D x 15.25"H
- Temp Range:

Blankets:

90°F - 160°F

- A warming shut-off system, separate from the electronic control, prevents overheating
- Interior blue lighting
- No fans or lint traps



OVERALL SIZE

24"W x 24.25"D x 35"H

COMPARTMENT SIZE

- 7.5 cubic ft.
- 21"W x 21.75"D x 28.25"H* * (13.12"H above & below the center shelf)
- Temp Range:

o Blankets:

90°F - 160°F

- · A warming shut-off system, separate from the electronic control, prevents overheating
- Interior blue lighting
- No fans or lint traps



P-2112

OVERALL SIZE

18.5W x 23.5"D x 22"H

COMPARTMENT SIZE

- 2.5 cubic ft.
- 15.5"W x 18.75"D x 15.25"H
- · Temp Range:
- Irrigation: 90°F 150°F
 Injection: 90°F 104°F
- Total Capacity:
 - o 16 1-liter bags or
 - o 12 1-liter bottles
- · Glide out basket
- Casters (option)



P-2122

OVERALL SIZE

18.5"W x 23.5"D x 28"H

COMPARTMENT SIZE

- 3.5 cubic ft.
- 15.5"W x 18.75"D x 21.25"H
- Temp Range:
- Irrigation: 90°F 150°F
 Injection: 90°F 104°F
- Total Capacity:
 - o 24 1-liter bags or
- o 24 1-liter bottles
- · Glide out basket
- · Casters (option)

warming cabinets

fluid

features

Fluid warmers feature 4 digit LED display, window doors, programmable temperature control and interior lighting.



P-2030-TC

OVERALL SIZE

26"W x 33"D x 28"H

features

- · Stainless steel
- 4" stainless steel casters with brakes
- 400 lbs. total weight capacity at 200 lbs. per shelf
- Top shelf
- Bottom shelf with 4-sided rail.
- Compatible with the P-2032, P-2230 and P-2240 warming cabinets



P-2010-TC

OVERALL SIZE

23.25"W x 32.25"D x 43"H

features

- · Stainless steel
- 4" casters with brake & swivel lock
- 300 lbs. total weight capacity at 100 lbs. per shelf
- Shelf Dimensions
 17"W x 27"D x 12½"H
- Compatible with the P-2010-S warming cabinet





P-2010-CB

OVERALL SIZE

21.25"W x 29.35"D x 6.81"H

features

- Platform
- 4" stainless steel casters with brakes
- 350 lbs. total weight capacity
- Perimeter bumper
- Cutouts in platform capture warming cabinet feet.
- Compatible with the P-2010-S warming cabinet

warming cabinet features



Fluid Warmers

- WarmSafe[™] Technology
- · Safety coated interior
- Fully insulated
- 120 VAC
- Heavy duty hardware
- · Glass door
- Perimeter bumper (P-2130 only)

Safety Features

- Built-in speaker for audible feedback
- Safety override feature prevents overheating
- · Lockout feature

Options

- · Optional left hand door swing available
- Option of casters or fixed legs

Warranty

- One Year Service
- Three Years on Parts
- · Lifetime Technical Support





Models

- P-2112
- P-2122
- P-2130



Blanket Warmers

- WarmSafe™ Technology
- · Safety coated interior
- Fully insulated
- 120 VAC
- · Heavy duty hardware
- Glass door (P-2010-S solid door)

Safety Features

- Built-in speaker for audible feedback
- Safety override feature prevents overheating
- · Lockout feature

Options

- · Optional left hand door swing available
- Option of casters or fixed legs
- Perimeter bumper is optional (excludes P-2055)

Warranty

- One Year Service
- Three Years on Parts
- Lifetime Technical Support





- P-2010-S
- P-2040 P-2210
- P-2012 P-2022
- P-2055
- P-2220 • P-2230
- P-2032
- P-2240

tri▼mode

Blanket & Fluid Warmers

- WarmSafe[™] Technology
- tri▼mode
- Safety coated interior
- Fully insulated
- 120 VAC
- Heavy duty hardware
- · Glass or solid door

Safety Features

- Built-in speaker for audible feedback
- Safety override feature prevents overheating (Deluxe models only)
- Lockout feature (Deluxe models only)

Options

- · Optional left hand door swing available
- Option of casters or fixed legs (excludes P-2150)
- Optional pass through warmer (P-2150 only).

Warranty

- One Year Service
- · Three Years on Parts
- Lifetime Technical Support





Models

- P-2147
- P-2150
- P-2420
- P-2430



Modular Configuration

Wall mount:

One to six (1-3) bag capacity Countertop:

One to three (1-3) bag capacity Pole mount:

One to three (1-3) bag capacity

Temperature:

- Heats to 104°F (40°C) in 30 minutes or less (slightly longer heating time is required for 3L bags)
- Accuracy of +0°/-2°C (+0°/-3°F)

Electronic Control

Monitors the length of time the bag has been held at temperature, displayed additionally by a status button. The control alerts users when a fluid bag has been held at temperature longer than 14 days.

Warranty

1 year parts and labor



ivNow

individual warming pods

features

The ivNow® fluid warmer quickly warms and maintains the temperature of injection/intravenous and irrigation solutions prior to their use. The specially contoured warming module cradles solution bags in 0.5-, 1-, 2- & 3-liter sizes. ivNow® units can be customized in the field by stacking or removing pods from the configuration. Units can be used for countertop use or wall mounted with the provided mounting plate.



ivNow-1

The ivNow-1 may be placed directly on the countertop or fitted with an optional bracket for mounting on a stand or wall.

P-2301-A

Mount

- Equipment pole stand
- · Wall mounting brackets

Capacity
One (1) bag, up to 3l *



ivNow-2

The ivNow-2 may be placed directly on the countertop or fitted with an bracket for mounting on a stand or wall.

P-2302-A

Mount

- Equipment pole stand
- Wall mounting brackets

Capacity
Two (2) bags, up to 31 *



ivNow-3

The ivNow-3 may be placed directly on the countertop or fitted with an bracket for mounting on a stand or wall.

P-2303-A

Mount

- Equipment pole stand
- Wall mounting brackets

Capacity

Three (3) bags, up to 31 *



mayo stands

foot-pedal operated

- Base designed to move under low clearance equipment with maximum stability
- Convenient foot-pedal operated lock adjusts height from 36" to 62"
- **co•re casters**™ corrosion-resistant, maintenance-free
- All welded stainless steel construction



P-1065-SS

- Removable extra large 20" x 25" stainless steel tray for easy cleaning
- Two 2" corrosion-resistant Gemini co•re casters™
- 50 lbs. weight capacity evenly distributed



P-1066-SS

- Removable 16¼" x 21¼" stainless steel tray for easy cleaning
- Two 2" corrosion-resistant Gemini co•re casters™
- 50 lbs. weight capacity evenly distributed



P-1068-SS

- Removable 12⁵/₈" x 19¹/₈" stainless steel tray for easy cleaning
- Two 2" corrosion-resistant Gemini **co•re casters**™
- 50 lbs. weight capacity evenly distributed



P-1069-SS

- Removable large 16½" x 21½" stainless steel tray for easy cleaning
- Four 2" corrosion-resistant Gemini **co•re casters**™
- 50 lbs. weight capacity evenly distributed



P-1066-A-SS

- Removable 16¼" x 21¼" stainless steel tray for easy cleaning
- Adjust height 36" to 60" friction lock
- Two 2" corrosion-resistant
 Gemini coore casters™
- 50 lbs. weight capacity evenly distributed



P-1068-A-SS

- Removable 12⁵/₈" x 19¹/₈" stainless steel tray for easy cleaning
- Adjust height 36" to 60" friction lock
- Two 2" corrosion-resistant Gemini **co•re casters**™
- 50 lbs. weight capacity evenly distributed

mayo stands

hand operated

- Base designed to move under low clearance equipment with maximum stability
- **co•re casters**™ corrosion-resistant, maintenance-free
- All welded stainless steel construction



P-1069-A-SS

- Removable large 16¼" x 21¼" stainless steel tray for easy cleaning
- Adjust height 36" to 60" friction lock
- Four 2" corrosion-resistant Gemini **co•re casters**™
- 50 lbs. weight capacity evenly distributed



P-66

- Removable 19¹/₈"L x 12⁵/₈"W stainless steel tray on powdercoated frame
- Adjust height from 32" to 53" friction lock
- Two 3" corrosion-resistant
 co•re casters™
- 20 lbs. weight capacity evenly distributed



P-65 Medical Tray Unit

- Removable 19¹/₈"L x 12⁵/₈"W stainless steel tray on chrome plated base
- Swivel height adjust from 30" to 40"
- Four 3" corrosion-resistant co•re casters™
- 40 lbs. weight capacity evenly distributed





basin stands

features

- Open frame design allows access from all sides
- **co•re casters**™ corrosion-resistant, maintenance-free
- Elevated ring basin bracket
- Mobile and easy to clean



P-78

- · Single basin stand
- Near chrome powder coat finish
- 13¾"D x 14"W x 33¾"H
- One removable 13½" diameter, 7 quart stainless steel basin
- Steel construction

P-1078-SS

- Single basin stand
- Stainless steel

13¾"D x 14"W x 33¾"H



P-1078-W/S-SS

- Single basin stand with shelf
- Stainless steel
- 13¾"D x 14"W x 33¾"H
- One removable 13½" diameter, 7 quart stainless steel basin
- Stainless steel construction

P-1079-W/S-SS

- Double basin stand with shelf
- Stainless steel
- 14"D x 28"W x 33¾"H



Double basin stand

- Near chrome powder coat finish
- 13¾"D x 28"W x 33¾"H
- Two removable 13½" diameter, 7 quart stainless steel basins
- Steel construction

P-1079-SS

- Double basin stand
- Stainless steel
- 14"D x 28"W x 33¾"H





P-1020-SS kick bucket

• Stainless steel

Overall size

133/4"diameter x 131/4"H

• Removable 12 quart, stainless steel bucket

kick buckets

features

- Balanced, tip-resistant
- Perimeter bumper to protect walls
- Electro-polished, stainless steel frame
- 2" diameter double ball bearing swivel casters for easy mobility



P-1025-SS

sponge receptacle

• Stainless steel

Overall size

161/2" diameter x 71/2" H

• Removable 81/2 quart, stainless steel basin





P-1130-L-SS

Dimensions

17¾"D x 18"W x 31"H

- Stainless Steel
- Quiet-Close™ lid dampener
- 3" co•re casters
- Foot operated
- Accommodates 18" bags

P-1130-SS

Dimensions

14"D x 16"W x 3034"H

- Stainless Steel
- No lid
- 3" co•re casters
- Accommodates 18" bags





hampers

Pedigo's newly designed lidded hampers feature the Quiet-Close™ lid dampener

for improved safety and added control of airborne bacteria and odors.

Linen hampers constructed of heavy gauge steel and feature double ball bearing, 3" corrosionresistant **co•re** casters[™] for easy mobility.



Quiet-Close[®] lid dampener



P-120-L and P-121-L

P-120-L

Dimensions

32"H with a 591/2" perimeter

- Powder coated steel
- Foot operated
- Accommodates 18" bags

P-121-L

Dimensions

35"H with a 807/8" perimeter

- Powder coated steel
- Foot operated
- Accommodates 25" bags



P-1120-L-SS and P-1121-L-SS

P-1120-L-SS

Dimensions

32"H with a 591/2" perimeter

- Stainless steel
- Foot operated
- Includes rolling bumpers
- Accommodates 18" bags

P-1121-L-SS

Dimensions

35"H with a 80⁷/₈" perimeter

- Stainless steel
- Foot operated
- Includes rolling bumpers
- Accommodates 25" bags



P-120 and P-121

P-120

P-121

Dimensions

Dimensions 32"H with a 591/2" perimeter

- Powder coated steel
- Accommodates 18" bags

35"H with a 80⁷/₈" perimeter

• Accommodates 25" bags

• Powder coated steel

P-1120-SS and P-1121-SS

P-1120-SS

Dimensions

32"H with a 591/2" perimeter

- Stainless steel
- Includes rolling bumpers
- Accommodates 18" bags

P-1121-SS

Dimensions

35"H with a 80⁷/₈" perimeter

- Stainless steel
- Accommodates 25" bags



P-1015-TC

Dimensions

28"D x 143/4"W x 401/4"H

- Stainless Steel
- Holds up to six P-1015
- 3" Genesis diameter swivel casters
- Genesis casters are maintenance-free (#62-B)









Rubber floor tips

features

Strong, all welded steel



footstools

Legs and handrail constructed of 1"

Corrugated, black rubber top surface

O.D. 16-gauge tubular steel

P-10 Powder Coat

12"D x 16"W x 8"H 300 lbs. weight capacity

P-10-A

Powder Coat

12"D x 16"W x 8"H 300 lbs. weight capacity

• 39"H with handrail

P-1010-A-SS

Stainless Steel

12"D x 16"W x 8"H 300 lbs. weight capacity

• 39"H with handrail

P-1010-SS

Stainless Steel

12"D x 16"W x 8"H 300 lbs. weight capacity

P-18

Powder Coat

12"D x 16"W x 161/4"H 300 lbs. weight capacity

- First step 9"H
- Second step 16¹/₄"H





Powder Coat

12"D x 16"W x 161/4"H 300 lbs. weight capacity

- First step 9"H
- Second step 16¼"H
- 47"H with handrail



P-11

Powder Coat

12"D x 30"W x 8"H

300 lbs. weight capacity

P-1011-SS

Stainless Steel

12"D x 30"W x 5"H

300 lbs. weight capacity



P-1012-SS

Stainless Steel

12"D x 30"W x 8"H

300 lbs. weight capacity



Safely stack for increased heigh

P-1015

Stainless Steel

14"D x 19"W x 61/4"H

650 lbs. weight capacity

- Interlock footstools to create larger platforms
- · Heavy gauge legs and handles





P-1572-4 four hook

- Hand operated, friction lock height adjustment
- Height adjustable from 68½" to 117½"
- · Five leg base
- 70 lbs. overall weight capacity
- 10 lbs. per hook (recommended 30 lbs. max. evenly distributed on top hooks for stability)

Safe Load Capacity

For stability, a safe load on this series I.V. pole should not exceed 40 lbs. to one side and needs to be within 6" of base tube center line.



iv stands

features

- Stainless steel
- Heavy, tip-resistant, all welded design
- 2" swivel dual-wheel casters for easy
- 211/4" diameter base on all stands mobility
- Tube: O.D. = 1"
- Easy to clean surfaces

clearview technology™

- For the easy reading of all IV bag labels from the front of the stand.
- Hooks are ideal for IV piggybacking of primary and secondary bags.



P-1572-CV six hook

- Hand operated, friction lock height adjustment
- Height adjustable from 69½" to 119"
- Five leg base
- 70 lbs. overall weight capacity
- 7 lbs. per hook (recommended 30 lbs. max. evenly distributed on top hooks for stability)



clearview technology™

P-1576-CV six hook

- Quick and easy onehand foot pedal height adjustment
- Height adjustable from 69½" to 119"
- 70 lbs. overall weight capacity
- 7 lbs. per hook (recommended 30 lbs. max. evenly distributed on top hooks for stability)
- Accommodates up to two infusion pumps (see safe load capacity)



Height adjustable from 70" to 120"



P-1095-8 eight hook

- Hand operated, friction lock height adjustment
- Height adjustable from 70" to 120"
- · Five leg base
- 95 lbs. overall weight capacity
- 10 lbs. per hook (recommended 30 lbs. max. evenly distributed on top hooks for stability)

Safe Load Capacity -

For stability, a safe load on this series stand should not exceed 75 lbs. within 6" off center.

 95 lbs max total pumps and bags.

infusion pump stand

features

Weight Capacity 75 lbs. 6" off center


- Bag Drop Prevention Device allows for controlled descent of pole.
- Stainless steel IV hook assembly features eight hooks.
- Heavy duty 3" sealed casters with precision ball bearings.
- Powder-coated 30 lbs. steel base.
- Pole sleeve welded securely to the base for reinforced stability.



infusion pump stand




Option - Handle & Tray Insert



Heavy-Duty 30 lbs. Base 26" Diameter



Offset Post

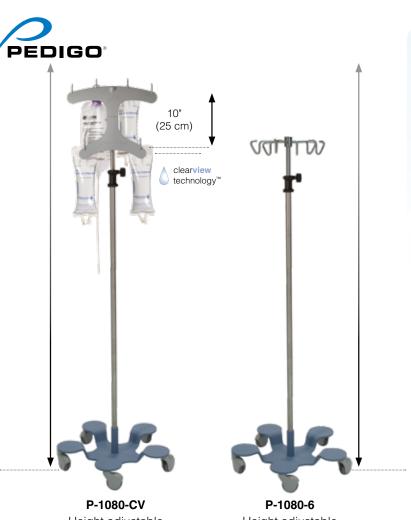

P-1080-CV Height adjustable from 71" to 124"

P-1080-6
Height adjustable from 721/2" to 124"



P-1083-CVHeight adjustable from 71" to 124"

P-1083-6
Height adjustable from 72½" to 124"

infusion pump stand

common features

- Bag Drop Prevention Device allows for controlled descent of pole.
- Heavy duty 3" (8cm) sealed casters with precision ball bearings.
- Extremely durable powder coat finish base.
- Low center of gravity design and 27 lbs. base offers improved stability
- Pole sleeve welded securely to the base for reinforced stability.
- Small 23" (58cm) base reduces stumbles and falls while patient ambulates.
- Hand operated easygrip[™] knob.

P-1080-CV

 High impact molded polymer IV hook assembly features six hooks.

P-1080-6

Six stainless steel IV hooks

P-1083-CV

- High impact molded polymer IV hook assembly features six hooks.
- Pole made from copper nickel alloy.

P-1083-6

- Pole made from copper nickel alloy.
- Six stainless steel IV hooks



Pole

Stainless steel resists staining, corrosion and rusting.

Stainless Steel Base

Low center of gravity design and 27 lbs. base offers improved stability.

23" Diameter Base

Small base reduces stumbles and falls while patient ambulates.

P-1080-SS

infusion pump stand

features

- Bag Drop Prevention Device allows for controlled descent of pole.
- Stainless steel IV hook assembly features six hooks.
- Heavy duty 3" (8cm) sealed casters with precision ball bearings.
- Corrosion resistant all stainless steel base.
- Pole sleeve welded securely to the base for reinforced stability.

Height adjustable from 70½" to 124"



Stainless base



infusion pump accessories



PATIENT HANDLE

Adjustable handle provides easy mobility.

P-3305 Stainless Steel
P-3306 Copper nickel alloy
P-3307 Black
P-3305-T Tray Insert



CV HOOK

Molded polymer six hook IV assembly

P-1090-CV-TH Assembly



INFUSION PUMP HOLDER

Holds up to 3 pumps P-1080-G Infusion Pump Holder



8-HOOK ASSEMBLY

Extended IV Hook Assembly P-1080-H Stainless Steel



IV SET ORGANIZER

Also holds secondary bags P-1080-B Stainless Steel



S'MORE HOOK

For mounting additional IV bags

P-1080-J Stainless Steel



infusion pump accessories



WIRE BASKET

P-3201 Large (Stainless) P-3202 Large (Black) P-3211 Med (Stainless) P-3212 Med Black



FOLEY HOOK

P-1080-D Foley 2 Hooks P-1080-E Foley 1 Hook (Factory installed)



O₂ HOLDER

Holds E-size oxygen tanks P-3601 Stainless Steel



OUTLET STRIP

Hospital grade P-3401 Six outlet strip



INFUSION PUMP HOOP

Holds up to 6 pumps
P-1080-F Stainless Steel
P-1083-F Copper nickel alloy





MULTIPLE PUMP HOLDER

Infusion pump holder
P-1080-C Stainless Steel
P-1083-C Copper nickel alloy











features

Pedigo's new IV stand features a number of unique design elements to further promote safety, organization and efficiency of IV fluid administration.

clearview technology™

High impact molded polymer IV hook assembly features six hooks for easy reading all IV bag labels from the front of the stand.

Built-in offset for IV piggybacking.

Smooth finish and easy to clean.

clearstep technology™

Created with patient and staff safety in mind, the element's clearstep base is ergonomically designed for easy ambulation.

interlockingbases™

The interlocking bases™ allow for multiple stands to be moved at one time by connecting the element™ together.

Designed for comfortable transport and storage of multiple stands.



Adjustment

Hand operated easygrip™ knob.

Pole

Stainless steel resists staining, corrosion and rusting.

Base

Five caster, 19 lbs. (9 kg) base offers improved stability.

Casters

Precision ball bearing sealed casters for ultra low rolling resistance.

Footprint - 21.25 (54 cm)


Small footprint allows unobstructed path while patient ambulates.

P-1090-CV Infusion Pump Stand

SPECIFICATIONS

| √ element™ | | P-1090-CV |
|---|--|---|
| Weight Overall Product Weight Base Weight (with Cas | | 26 lbs. (12 kg) 19 lbs. (9 kg) |
| Weight Capacity (Maxin Hooks (each) Offset Load (Base Tu Total Load [‡] Number of Pumps pe | ube)† | 7 lbs. (3 kg) 40 lbs. (18 kg) 90 lbs. (41 kg) 4 (10 lbs. each) |
| Casters 5 Swivel Casters | | 3" (8 cm) |
| Height Adjustment Low High | | 74" (188 cm) 122" (310 cm) |
| Base Diameter (Caster | Centerline) | 21.25" (54 cm) |
| Number of Interlocking | Stands (Max.) | 6 |
| Accessories Patient Handle Outlet Strip | O ₂ Holder Foley bag Hoo | Basket k |

- † 40 lbs max applied at 6" off center, 3 ft off ground
- ‡ 90 lbs max applied at centerline of pole, 3 ft off ground



The clearview™ hooks are ideal for IV piggybacking of primary and secondary bags with a full 10" of height difference between bags.



With a recess on each side of the base, emulating the natural shape of the foot, clearstep™ allows for safe ambulation.





CDS-3060 Main Table

Dimensions 30"D x 60"W x 34"H

20"D x 60"W

CDS-3072

Main Table

Top Shelf

Top Shelf

20"D x 72"W

Dimensions 30"D x 72"W x 34"H

space station

two tier back table

A specialty back table designed with additional room for large cases such as orthopedics, spinal fusions, neuro craniotomies. The tuck-away cantilevered shelf holds multiple travs and is angled for clear observation of instruments.

The Space Station is easily rolled into position using 4" diameter, heavy-duty ball bearing brake/swivel casters. To lock swivel caster, simply engage the single-pedal brake.

One Person Operation



Pneumatic assist enables oneperson operation in raising or lowering the cantilevered shelf.



Shelf is easily raised when extra space is required, or lowered into storage position if not needed.




Cantilevered shelf features a 10° slope and has an adjustable height from 49.9" to 52.9".



Disposable Table Drapes

Pedigo Trusted Fit drapes feature heavy-duty three layer construction. 12 Drapes per case.

CDS-3060-DD 5' table (1.5m) **CDS-3072-DD** 6' table (1.8m)

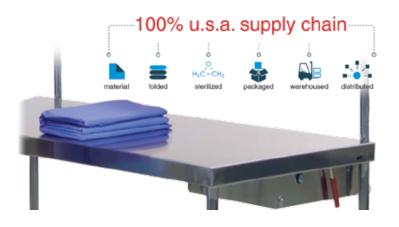





Elevate & Illuminate Table CDS-3060-ADJ-E5' table (1.5m) CDS-3072-ADJ-E6' table(1.8m)

Illuminate Table

CDS-3060-L.....5' table (1.5m) CDS-3072-L.....6' table(1.8m)

space station

electric adjustable back table

Pedigo's **NEW** Space Station back table is now electro-hydraulically height adjustable and LED illuminated for improved visibility.

efficiency • ergonomic • safety

For patient and staff safety, the Space Station Two-Tier Back Table meets the highest hospital safety standards. IEC 60601-1 and UL approved E 503 186 approved.







Height Adjustment

The UP/DOWN buttons for height control are located to the left of the power supply.



Power Cord

Hospital grade power cord can be wound around cord loops when not in use. Cord length measures 9' 8" (3m).



Latch Release

Pull up on the release latch to disengage and lower upper tier. Release Latches are located on either side of the table.



Casters

The Electric Adjustable Space Station features four Total Lock Casters each measuring 4" (10cm) in diameter.



Power Supply

At the back of the table are two independent ON/OFF toggle switches to control the entire table unit and a second for the LED lights.



Space Station

video demo

draping video demo online www.pedigo-usa.com





Elevate & Illuminate Table

CDS-3060-ADJ-E... 5' table (1.5m) CDS-3072-ADJ-E... 6' table(1.8m)

Illuminate Table



space station

electric adjustable back table

Pedigo's **NEW** Space Station back table is now electro-hydraulically height adjustable and LED illuminated for improved visibility.


efficiency • ergonomic • safety

For patient and staff safety, the Space Station Two-Tier Back Table meets the highest hospital safety standards. IEC 60601-1 and UL approved E 503 186 approved.





Upper tier in raised position

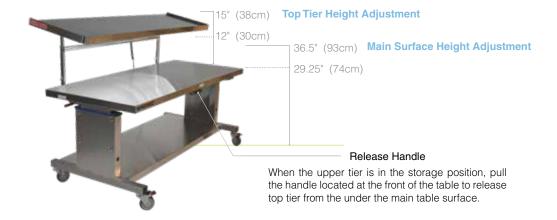





CDS-1100

Main Table Top Surface 72"W x 30"D

Height Adjustable 32" to 431/4"H

instrument

assembly station table

features

- Electrically operated hydraulic height adjustment provides comfortable, ergonomic height settings for all staff members.
- Shelves are positioned 18" and 30" above main work surface, and measure 72"W x 12"D with 5/8" front lip.
- Shelves also feature a 10° slope.
- Load capacity of 225 pounds on main work surface and 50 pounds on each upper shelf.
- 4" zinc plated steel brake/swivel lock casters with precision ball bearings for easy mobility.

accessories



- Work Lamp arm has a 42" reach
- Features a 5" viewing lens
- 75% magnification

2) Outlet Strip CDS-1015

- Hospital grade
- Six outlets
- 15' foot cord

(3) Keyboard Tray CDS-1032

- Measures 22½"W x 10"D x 2¾"H
- Tray extends 10½" (retractable)
- Built-in mouse tray comes standard

Computer Enclosure CDS-1031

- Open back for air flow and easy access to computer cords.
- Enclosure can be customized to accommodate larger computer towers (max. load 30 lbs/13.60 kg)

5 Extension Arm CDS-1030

- Supports LCD monitors (max. load 25 lbs / 11.3 kg)
- For optimal viewing, extension arm features multi-directional adjustment
- Gas-strut and ball-joint system for smooth, stable operation

6 Storage Cart CDS-1010

- 4 drawer tote box cart for added storage fits under the workstation
- Totes are constructed of impact-resistant, high-density polyethylene and measure 17¾"L x 14½"W x 5"D







Mid-Size Tables with Shelf

Dimensions

| SG-82-SS | 20"W x 16"D x 34"H |
|----------|--------------------|
| SG-84-SS | 30"W x 16"D x 34"H |
| SG-86-SS | 33"W x 18"D x 34"H |
| SG-88-SS | 36"W x 20"D x 34"H |

instrument

tables

features

- Stainless steel Steril-Gard construction eliminates full sub-tops where undesirable substances can collect
- Easy to clean
- Lightweight but strong
- 3" double ball bearing, corrosion-resistant **co∘re casters**™
- Sound-deadened reinforcing channels for quiet use*
- * feature not present on model SG-82-SS



Mid-Size Tables without Shelf

Dimensions

| SG-83-SS | 20"W x 16"D x 34"H |
|----------|--------------------|
| SG-85-SS | 30"W x 16"D x 34"H |
| SG-87-SS | 33"W x 18"D x 34"H |
| SG-89-SS | 36"W x 20"D x 34"H |



Large Tables with Shelf

| | Dimensions | | | | |
|----------|--------------------|--|--|--|--|
| SG-90-SS | 48"W x 20"D x 34"H | | | | |
| SG-92-SS | 48"W x 24"D x 34"H | | | | |
| SG-94-SS | 60"W x 24"D x 34"H | | | | |
| SG-96-SS | 72"W x 24"D x 34"H | | | | |

SG-98-SS 36"W x 24"D x 34"H



Large Tables without Shelf

Dimensions

| | Dillicitorio |
|----------|--------------------|
| SG-91-SS | 48"W x 20"D x 34"H |
| SG-93-SS | 48"W x 24"D x 34"H |
| SG-95-SS | 60"W x 24"D x 34"H |
| SG-97-SS | 72"W x 24"D x 34"H |
| SG-99-SS | 36"W x 24"D x 34"H |
| | |

options

- 3 or 4 sided top and shelf rails available for all tables.
- Stainless steel drawers, or tote boxes may be mounted under top.
- Table height can be modified

Tote Boxes

Impact-resistant, high-density polyethylene.

- CDS-TB-5" (17³/₄"L x 14¹/₂"W x 5¹/₈"D)
- CDS-TB-10" (17¾"L x 14½"W x 10"D)

Tote Box Hangers

- SG-TBH-1 16"D SG Tables
- SG-TBH-2 18"D SG Tables
- SG-TBH-3 20"D SG Tables
- SG-TBH-4 24"D SG Tables

Glides/ Rubber Feet/ Casters

- #15 Glides
- #13 Rubber Feet
- #06 Locking Casters

IVPole for SG Tables

 P-7202-1 available on lower shelf models only.



new

co-re

caster

SG-80-SS

table with shelf, drawer and rail

overall size 20"W x 16"D x 34"H

drawer size $15\frac{1}{4}$ "W x $12\frac{1}{2}$ "L x 3"H (I.D)



features

- Convenient and easy to use
- Stainless steel, Steril-Gard construction eliminates full sub-tops
- Improves the control of undesirable substances
- Full extending drawer hangers (except SG-81-SS)
- Sound-proofed reinforcing channels for quiet use and added strength
- 3" double ball bearing, rubber casters for silent mobility
- 1½" high 3-sided top rail

options

- Part No. 46-B Drawer lock with key
- Part No. 06 3" casters with brakes



SG-80-A-SS

table with shelf, two drawers and rail

overall size $20"W \times 16"D \times 34"H$

drawer size (I.D.) 151/4"W x 121/2"L x 3"H



SG-80-B-SS

table with shelf and drawer

overall size 20"W x 16"D x 34"H

drawer size (I.D.) 15½"W x 12½"D x 3"H



SG-80-C-SS

table with shelf and two drawers

overall size 20"W x 16"D x 34"H drawer size (I.D.) 151/4"W x 121/2"D x 3"H



SG-81-SS

table with shelf and rail

overall size 20"W x 16"D x 34"H



SG-82-SS

table with shelf

overall size 20"W x 16"D x 34"H





CDS-2472

overall size: 72"W x 24"D x 34"H



optional accessories

- 4" swivel casters with brakes
- Full length lower shelf
- Tote box drawers: 5" or 10" deep
- Stainless steel drawers: 15½"W x 12½"D x 3½"H (installed, complete)





features

Heavy duty, all stainless steel construction

central supply

tables

- Height adjustable floor glides
- For use in areas where a table larger than a standard utility or work table is needed



CDS-3260

Overall size: 60"W x 32"D x 34"H

optional accessories

- 4" swivel casters with brakes
- Full length lower shelf
- Sterile Wrap frame: 56"W x 301/2"H
- Tote box drawers: 5" or 10" deep
- Stainless steel drawers: $15\frac{1}{2}$ "W x $12\frac{1}{2}$ "D x $3\frac{1}{2}$ "H (installed, complete)



CDS-3684

Overall size: 84"W x 36"D x 34"H

optional accessories

- 4" swivel casters with brakes
- Full length lower shelf
- Tote box drawers: 5" or 10" deep
- Stainless steel drawers: 15½"W x 12½"D x 3½"H (installed, complete)



P-5182 Dimensions

Standard Top 34"W x 42"D

Pedigo's Over-Operating Specialty Table is constructed of stainless steel and features easy, one-hand height adjustment.

- 3" total lock casters, with brakes and swivel locks
- Adjustable height from 37¼" to 52¼"high from floor
- 27¾" clearance between legs
- Other sizes available upon request.



P-5190-E Dimensions

Standard Top 36"W x 42"D

over-operating

| Part Number | Description | Dimension | | | ` |
|-------------|----------------------|------------------|--------------------|---------------------|---------------------|
| P-5182-3 | Base ONLY (Standard) | 28" ID Clearance | | | |
| P-5182-34 | Base ONLY (Wide) | 34" ID Clearance | | | |
| P-5182-36 | Base ONLY (X-Wide) | 36" ID Clearance | | | |
| | | | | | |
| | | | Base (P-5182-3) | Base (P-5182-34) | Base (P-5182-36) |
| P-5182-2 | Top ONLY (Standard) | 34"W x 42"D | • | | |
| P-5182-3420 | Top ONLY | 34"W x 20"D | • | | |
| P-5182-3424 | Top ONLY | 34"W x 24"D | • | | |
| P-5182-3430 | Top ONLY | 34"W x 30"D | • | | |
| P-5182-3436 | Top ONLY | 34"W x 36"D | • | | |
| P-5182-3448 | Top ONLY | 34"W x 48"D | • | | |
| | | | | | |
| P-5182-3820 | Top ONLY | 38"W x 20"D | • | | |
| P-5182-3824 | Top ONLY | 38"W x 24"D | • | | |
| P-5182-3830 | Top ONLY | 38"W x 30"D | • | | |
| P-5182-3836 | Top ONLY | 38"W x 36"D | • | | |
| P-5182-3842 | Top ONLY | 38"W x 42"D | • | | |
| P-5182-3848 | Top ONLY | 38"W x 48"D | • | | |
| P-5182-4220 | Top ONLY | 42"W x 20"D | | | |
| P-5182-4224 | Top ONLY | 42"W x 24"D | | • | |
| P-5182-4230 | Top ONLY | 42"W x 30"D | | | |
| P-5182-4236 | Top ONLY | 42"W x 36"D | | • | |
| P-5182-4242 | Top ONLY | 42"W x 42"D | • | • | • |
| P-5182-4248 | Top ONLY | 42"W x 48"D | • | • | • |
| | | | | | |
| P-5182-4620 | Top ONLY | 46"W x 20"D | • | • | • |
| P-5182-4624 | Top ONLY | 46"W x 24"D | • | • | • |
| P-5182-4630 | Top ONLY | 46"W x 30"D | • | • | • |
| P-5182-4636 | Top ONLY | 46"W x 36"D | • | • | • |
| P-5182-4642 | Top ONLY | 46"W x 42"D | • | • | • |
| P-5182-4648 | Top ONLY | 46"W x 48"D | • | • | • |

The various sizes/configuration shown in the chart above are **ONLY available for the P-5182** over-operating table.

Adjustable Over-Operating Table may be height adjusted during the surgical case while the staff is gowned and sterile. To raise or lower the main table surface, simply engage the electric motor by depressing the foot pedal.

- 3" total lock casters, with brakes and swivel locks
- 28⁷/₈" clearance between legs
- Adjustable height from 40½" to 51½" high from floor (underside of table height from 35½" to 46½" high from floor)





P-521-GST-521-GS

- 141/2" round fully padded seat with back
- 23½" diameter aluminum base
- 2" dual wheel casters
- · Height adjustment (pneumatic) of 191/4" to 23¾"
- Adjustable backrest



P-526-GST-526-GS

- 14½" round fully padded seat
- 23½" diameter aluminum base
- 2" dual wheel casters
- Height adjustment (pneumatic) of 191/4" to 23¾"

seating

five series

features

weight capacity rating of 300 lbs.

upholstery

- classic •
- royal

dual wheel locking casters option

- 66 Locking Casters (activated upon standing)
- 66-A Locking Casters (activated upon sitting)



• P-536

- T-536
- 14" cushioned seat
- 21½" diameter chrome base
- 3" co•re casters™
- · Height adjustment (screw shaft) of 173/4" to 261/8



P-536-GST-536-GS

- 14" cushioned seat
- 21½" diameter chrome base
- 3" co•re casters™
- · Height adjustment (pneumatic) of 183/4" to 231/2"



P-551-GS T-551-GS

- 16" x 17" cushioned seat
- 21½" diameter chrome base
- Adjustable back support
- 3" co•re casters™
- Height adjustment (pneumatic) of 191/4" to 24" height
- Adjustable backrest



- 16" x 17" cushioned seat
- 21½" diameter chrome base
- Adjustable back support
- 3" co•re casters™

co·re caster

- Height adjustment (pneumatic) of 255/8" to 33"
- Adjustable backrest

^{*} locking casters option not available * locking casters option not available

^{*} locking casters option not available

^{*} locking casters option not available



P-1037-SS

- 14" round stainless steel contoured seat
- Rubber floor tips
- Height adjustment (screw shaft) of 201/8" to 323/8"

P-1037-W/C-SS

- 3" co•re casters™
- Height adjustment (screw shaft) of 221/2" to 345/8"

seating

stainless steel series

ffeatures

- weight capacity rating of 300 lbs.
- Available in Classic

upholstery

- classic
- royal

dual wheel locking casters option

- 66 Locking Casters (activated upon standing)
- 01-B Adaptor (required for 66)



P-1038-SS •T-1038-SS

- 14" round cushioned seat
- Rubber floor tips
- Height adjustment (screw shaft) of 22" to 341/2"

● P-1038-W/C ● T-1038-W/C

- 3" co•re casters
- Height adjustment (screw shaft) of 241/4" to 363/4"



• P-527-GS

• T-527-GS

- 141/2" round fully padded seat
- 231/2" diameter aluminum base
- 2" dual wheel casters
- Adjustable backrest
- Height adjustment of 19½" to 24½" (pneumatic)

seating

foot-operated

features

• weight capacity rating of 300 lbs.

upholstery

- classic •
- royal

locking casters option

- 66 Locking Casters (activated upon standing)
- 66-A Locking Casters (activated upon sitting)



P-528-GST-528-GS

- 141/2" round fully padded seat
- 231/2" diameter aluminum base
- 2" dual wheel casters
- Height adjustment of 19½" to 24½" (pneumatic)



• P-36

● T-36

- 14" round cushioned seat
- 3" co•re casters™
- Height adjustment (screw shaft) of 17⁷/₈" to 26¹/₄"

seating

powder-coat series

eatures

• weight capacity rating of 300 lbs.

upholstery

- classic •
- royal (

dual wheel locking casters option

- 66 Locking Casters (activated upon standing)
- 01-B Adaptor (required for 66)



• P-38

◦T-38

- 14" round cushioned seat
- Rubber floor tips
- Height adjustment (screw shaft) of 22" to 34½"

P-38-W/CT-38-W/C

- 3" co•re casters™
- Height adjustment (screw shaft) of 24¹/₄" to 36³/₄"



- 18" x 19" contoured cushioned seat
- Height adjustment (pneumatic) of 17½" to 23¼"
- Easy rolling 2" dual wheel casters
- 25" diameter footprint
- Adjustable backrest
- Adjustable arm rests



●T-581

- 18" x 19" contoured cushioned seat
- Height adjustment (pneumatic) of 17½" to 23¼"
- Easy rolling 2" dual wheel casters
- 25" diameter footprint
- · Adjustable backrest

seating ergo task chair

features

Pedigo's ergonomically designed task chairs feature pneumatic height adjustment, dual wheel casters, 5-star base, integrated lumbar support, and independent backrest/seat pan height and tilt controls. PVC and latex free.

• weight capacity rating of 300 lbs.

upholstery

• only available in royal

locking casters option

 81 Locking Casters (activated upon standing)



T-582

- 18" x 19" contoured cushioned seat
- Height adjustment (pneumatic) of 17½" to 23¼"
- Easy rolling 2" dual wheel casters
- 23" diameter footprint (small)
- Adjustable backrest



- 18" x 19" contoured cushioned seat
- Height adjustment (pneumatic) of 241/4" to 341/4"
- Easy rolling 2" dual wheel casters
- 25" diameter footprint
- Adjustable backrest
- · Adjustable arm rests

● T-584

- 18" x 19" contoured cushioned seat
- Height adjustment (pneumatic) of 231/2" to 331/2
- Easy rolling 2" dual wheel casters
- 25" diameter footprint
- Adjustable backrest

seating

ergo task anesthesia chair

features

Ergonomically designed anesthesia chair, Pedigo's T-583 features pneumatic height adjustment, dual wheel casters, 5-star base, integrated lumbar support and independent backrest/seat pan height tilt controls. PVC and latex free.

• weight capacity rating of 300 lbs.

upholstery

only available in royal

locking casters option

 81 Locking Casters (activated upon standing)





• P-7000

- Specially contoured seat for added comfort
- Sensafoam body contouring seat and back
- · Seat features backrest
- Height adjustable and articulating arm/wrist rests
- 21" diameter base with high grade 3" casters
- 5-caster base
- Three locking casters
- Adjustable backrest
- Height adjustment (hydraulic) of 20¾" to 28¼" single pedal, foot-operated



● P-6000 with Backrest

- 16" round fully padded
- Seat features backrest
- 21" diameter base
- Powder-coated 5-caster base
- High grade 3" casters
- Three locking casters
- Height adjustment (hydraulic) of 223/4" to 301/4" - single pedal, foot-operated



● P-6001 without Backrest

- 16" round fully padded
- No backrest
- 21" diameter base
- Powder-coated 5-caster base
- High grade 3" casters
- · Three locking casters
- Height adjustment (hydraulic) of 223/4" to 301/4" - single pedal, foot-operated

seating

hydraulic surgeon chair

features

Hydraulic Surgeon Chairs are ideal for surgery, anesthesiology, ENT and reconstructive procedures.

weight capacity rating of 300 lbs.

upholstery

only available in classic

option (P-6000)

• articulating arm rests #P-6000-D





● P-6001 with Procedure Rest

- Rotates a full 360 degrees
- Upholstered for comfort
- Special density foam provides comfort and support during long procedures
- 16" round fully padded
- Height adjustment of 243/8" to

Part No. P-6000-PR and P-6001

● P-526 with Procedure Rest

- Rotates a full 360 degrees
- Upholstered for comfort
- Special density foam provides comfort and support during long procedures
- 14½" round fully padded seat
- Height adjustment of 211/2"to

Part No. P-526-PR and P-526-GS

upholstery chart

Classic Durable, vinyl based fabrics, Pedigo Classic upholstery is latex-free and California TB-117 approved.

Indicates: Pedigo Classic upholstery and unit testing:

California TB-117



Royal

Environment friendly, Pedigo Royal upholstery is latex-free, PVC-free, California TB-117 approved.

Indicates: Pedigo Royal upholstery and unit testing:


O California TB-117 California TB-117 and TB-133 approved



Above color samples are representations of upholstery materials. Actual colors may vary slightly. Material samples available upon request.


Technical Bulletins The State of California developed a number of testing standards known as Technical Bulletins for the purpose of evaluating the flammability of furniture.

• CALTB-117 Flammability test for the filling or padding



CALTB-133 A full-scale fire test of the entire unit including the frame, foam and upholstery.

American National Standard for Office Furnishings



• Business & Institutional Furniture Manufacturer's Assoc.

A not-for-profit organization that advocates, informs and develops standards for the North American office and institutional furniture industry.



Care Instructions

PreFixx® is engineered so that upholstery can be cleaned again and again without showing signs of wear. With easy cleanability, and proven stain and abrasion resistance, PreFixx protective finish can reduce maintenance costs and frequent re-upholstery.

Performance: Offers state-of-the-art resistance against staining, burnishing, abrasion, scuffing and blocking.

Durability: Creates a barrier that resists stains from penetrating to the surface of the vinyl for proven, long-lasting protection. With laboratory-tested stain resistance and improved wear properties, upholstery treated with PreFixx protective finish can retain a "likenew" appearance longer.

Easy Maintenance: Enables most common stains like dirt and smudges to wipe off easily. Many difficult stains like ballpoint ink also can be cleaned with active solvents. such as nail polish remover, without damaging the PreFixx protective finish (when recommended cleaning instructions are followed).





bassinet

P-1110-B-SS features

- Side mounted drawer measures:
 16½"W x 21¼"L x 3½"H
- Design allows close approach from both sides
- Basket can be raised at either end
- 3" double ball bearing swivel casters

frame size

181/4"W x 31"L x 373/4"H (Height with bassinet basket: 41~H)



P-1110-SS bassinet stand

features

- · Design allows close approach from both sides
- Basket can be raised at either end
- 3" double ball bearing swivel casters

frame size

 $18\frac{1}{4}$ "W x 31"L x 37\%"H

• Height with bassinet basket: 41"H



P-1110-A-SS bassinet stand with drawer

features

- End mounted drawer measures: 16½"W x 13½"L x 73/8"H
- Design allows close approach from both sides
- · Basket can be raised at either end
- 3" double ball bearing swivel casters

frame size

 $18\frac{1}{4}$ "W x 31"L x 37\%"H

• Height with bassinet basket: 41"H



shown with optional bassinet and pad



shown with optional bassinet and pad



P-1115-A-SS

bassinet cabinet

features

- Bassinet carriage slides back to allow working area
- Friction lock secures the bassinet in both open and closed positions
- Removable internal shelf, positioned in middle left compartment
- 4" double ball bearing swivel casters

dimensions

19¾"W x 30⁷/8"L x 37¼"H

• Height with bassinet 441/8"

cabinet dimensions

• 17"W x 29½"L x 24⁷/8"H

drawer frame with removable pan

• 111/4"W x 161/2"L x 4"H

P-1115-SS

bassinet cabinet

features

- Bassinet carriage slides back to allow working area
- Friction lock secures the bassinet in both open and closed positions
- Removable internal shelf, positioned in middle left compartment
- 4" double ball bearing swivel casters

dimensions

19¾"W x 30⁷/8"L x 37¼"H

• Height with bassinet 441/8"

cabinet dimensions

• 17"W x 29½"L x 24⁷/8"H

drawer frame with removable pan

• 111/4"W x 161/2"L x 4"H

ST-1833-SS

pediatric scale table

features

- Designed for use with common electronic scales
- Oversize 4" casters for easy movement
- One brake caster for stability

dimensions

33"W x 18"D x 351/2"H









Wall cabinet P-8535 with sloped top

wall cabinets with glass doors

| Part No. | Dimensions | Shelves | Doors | Тор |
|----------|---------------------|---------|-------|--------|
| P-8510 | 25¾"W x 13"D x 30"H | 2 | 1 | Flat |
| P-8515 | 25¾"W x 13"D x 39"H | 2 | 1 | Sloped |
| P-8530 | 47"W x 13"D x 30"H | 2 | 2 | Flat |
| P-8535 | 47"W x 13"D x 39"H | 2 | 2 | Sloped |
| P-8610 | 25¾"W x 13"D x 36"H | 2 | 1 | Flat |
| P-8615 | 25¾"W x 13"D x 45"H | 2 | 1 | Sloped |
| P-8630 | 47"W x 13"D x 36"H | 2 | 2 | Flat |
| P-8635 | 47"W x 13"D x 45"H | 2 | 2 | Sloped |
| P-8710 | 25¾"W x 13"D x 48"H | 3 | 1 | Flat |
| P-8715 | 25¾"W x 13"D x 57"H | 3 | 1 | Sloped |
| P-8730 | 47"W x 13"D x 48"H | 3 | 2 | Flat |
| P-8735 | 47"W x 13"D x 57"H | 3 | 2 | Sloped |

wall cabinets with solid doors

| Par | t No. | Dimensions | Shelves | Doors | Тор |
|-----|-------|---------------------|---------|-------|--------|
| P-8 | 3511 | 25¾"W x 13"D x 30"H | 2 | 1 | Flat |
| P-8 | 3516 | 25¾"W x 13"D x 39"H | 2 | 1 | Sloped |
| P-8 | 3531 | 47"W x 13"D x 30"H | 2 | 2 | Flat |
| P-8 | 3536 | 47"W x 13"D x 39"H | 2 | 2 | Sloped |
| P-8 | 3611 | 25¾"W x 13"D x 36"H | 2 | 1 | Flat |
| P-8 | 3616 | 25¾"W x 13"D x 45"H | 2 | 1 | Sloped |
| P-8 | 3631 | 47"W x 13"D x 36"H | 2 | 2 | Flat |
| P-8 | 3636 | 47"W x 13"D x 45"H | 2 | 2 | Sloped |
| P-8 | 3711 | 25¾"W x 13"D x 48"H | 3 | 1 | Flat |
| P-8 | 3716 | 25¾"W x 13"D x 57"H | 3 | 1 | Sloped |
| P-8 | 3731 | 47"W x 13"D x 48"H | 2 | 2 | Flat |
| P-8 | 3736 | 47"W x 13"D x 57"H | 2 | 2 | Sloped |

wall cabinets

features

- Stainless steel cabinetry to maximize storage and space utilization
- Double panel doors with FDA approved polyethylene foam for glass shock resistance
- 3/16" tempered glass doors with stainless steel lockable paddle latch
- Radius glass panels for ease of cleaning
- Adjustable stainless steel door hinges
- Stainless steel shelves adjustable in ½" increments

options

- Keyed door latch
- Stainless steel pegboard
- Additional shelves
- Solid doors







P-8230 Free-standing cabinet



Built-in cabinets with trim bezel



Sloped top with caster base

operating room

cabinets

features

- Stainless steel cabinetry to maximize storage and space utilization
- Available as free-standing, built-in, or caster base models
- Adaptable to custom installations
- Radius glass panels for ease of cleaning
- Adjustable stainless steel door hinges
- Keyed door latch
- Adjustable nylon floor glides for leveling
- 3/16" tempered glass doors with stainless steel lockable paddle latch
- Double panel doors with FDA approved polyethylene foam for glass shock resistance
- Stainless steel shelves adjustable in ½" increments

options

- Stainless steel
- Built-in designs
- Trim bezel for built-in applications
- Caster base with locking casters (Cabinet model height will vary consult drawing)
- Solid doors
- Additional shelves

| Part No. | Dimensions | Shelves | Top |
|----------|--|---------|--------|
| P-8010 | 25¾"W x 18"D x 60"H | 3 | Flat |
| P-8015 | 25¾"W x 18"D x 72"H | 3 | Sloped |
| P-8020 | 25¾"W x 24"D x 60"H | 3 | Flat |
| P-8025 | 25¾"W x 24"D x 75 ⁵ / ₈ "H | 3 | Sloped |
| P-8030 | 47"W x 18"D x 60"H | 3 | Flat |
| P-8035 | 47"W x 18"D x 72"H | 3 | Sloped |
| P-8040 | 47"W x 24"D x 60"H | 3 | Flat |
| P-8045 | 47 "W x 24 "D x 75 $^{5}/_{8}$ "H | 3 | Sloped |
| P-8070 | 35 ³ / ₈ "W x 18"D x 60"H | 3 | Flat |
| P-8075 | $35^{3}/_{8}$ "W x 18 "D x 72 "H | 3 | Sloped |
| P-8080 | 35 ³ / ₈ "W x 24"D x 60"H | 3 | Flat |
| P-8085 | $35^{3}/_{8}$ "W x 24"D x $75^{5}/_{8}$ "H | 3 | Sloped |
| P-8110 | 25¾"W x 18"D x 72"H | 4 | Flat |
| P-8115 | 25¾"W x 18"D x 84"H | 4 | Sloped |
| P-8120 | 25¾"W x 24"D x 72"H | 4 | Flat |
| P-8125 | 25 ³ / ₄ "W x 24"D x 87 ⁵ / ₈ "H | 4 | Sloped |
| P-8130 | 47"W x 18"D x 72"H | 4 | Flat |
| P-8135 | 47"W x 18"D x 84"H | 4 | Sloped |

dimensions or cabinets

| Part No. | Dimensions | Shelves | Ton |
|----------|--|---------|--------|
| | | | Тор |
| P-8140 | 47"W x 24"D x 72"H | 4 | Flat |
| P-8145 | 47"W x 24 "D x 87 ⁵ / ₈ "H | 4 | Sloped |
| P-8170 | 35 ³ / ₈ "W x 18"D x 72"H | 4 | Flat |
| P-8175 | 35 ³ / ₈ "W x 18"D x 84"H | 4 | Sloped |
| P-8180 | 35 ³ / ₈ "W x 24"D x 72"H | 4 | Flat |
| P-8185 | $35^{3}/_{8}$ "W x 24"D x $87^{5}/_{8}$ "H | 4 | Sloped |
| P-8210 | 25¾"W x 18"D x 84"H | 5 | Flat |
| P-8215 | 25¾"W x 18"D x 96"H | 5 | Sloped |
| P-8220 | 25¾"W x 24"D x 84"H | 5 | Flat |
| P-8225 | 25 ³ / ₄ "W x 24"D x 99 ⁵ / ₈ "H | 5 | Sloped |
| P-8230 | 47"W x 18"D x 84"H | 5 | Flat |
| P-8235 | 47"W x 18"D x 96"H | 5 | Sloped |
| P-8240 | 47"W x 24"D x 84"H | 5 | Flat |
| P-8245 | 47"W x 24"D x 99 ⁵ / ₈ "H | 5 | Sloped |
| P-8270 | 35 ³ / ₈ "W x 18"D x 84"H | 5 | Flat |
| P-8275 | 35 ³ / ₈ "W x 18"D x 96"H | 5 | Sloped |
| P-8280 | 35 ³ / ₈ "W x 24"D x 84"H | 5 | Flat |
| P-8285 | 35 ³ / ₈ "W x 24"D x 99 ⁵ / ₈ "H | 5 | Sloped |





Easily add additional storage space with Pedigo wall shelves.

wall shelves

features

- Stainless steel construction
- Pre-drilled for convenient wall mounting
- Shelves are available in a variety of sizes





P-7202

Cardiac & Anesthesia Cabinet

Overall Size 28"W x 18"D x 33"H Top Drawer 211/4"W x 16"D x 31/4"H **Bottom Drawer** 211/4"W x 16"D x 31/4"H



shown with optional cart accessories

P-7202-C

Same as P-7202 w/ complete accessory package

optional accessories for P-7202

- O₂ holder (holds 2 E-size tanks)
- 25' electrical outlet cord
- I.V. rod
- Push handle
- Cabinet locking rod

anesthesia

& treatment cabinets

P-7202 features

- Designed for cardiac and other emergency uses or as a large anesthesia cabinet
- Provides space for instruments, vials, and other necessary equipment
- 4" double ball bearing swivel casters



P-1100-SS

Anesthesia Table with Drawer

Overall Size 213/8"W x 14"D x 341/4"H

125/8" W x 5/8"D x 195/8"H

153/8" W x 121/2" D x 31/4"H

features

- Ideal cart for storage of various instruments and supplies
- Two removable stainless steel trays
- Towel bar and two mask hooks
- 2" double ball bearing swivel casters



P-5090

Small Treatment Cabinet

Overall Size

16"W x 20"D x 33"H

Drawer

131/2"W x 12"D x 31/2"H

features

- Solid stainless steel retaining rail
- Internal shelf for optimal storage
- Optional locking rod
- 2" double ball bearing swivel casters



P-1105-SS

Anesthesia Cabinet with Drawers

Overall Size

 $19^{1}/8$ "W x $15^{5}/8$ "D x $33^{3}/8$ "H

Upper 3 Drawers

131/2"W x 12"D x 31/2"H

Bottom Drawer

131/2"W x 12"D x 7"H

features

- Provides extra storage space
- Full extending drawer hangers
- Removable 12⁵/₈" x 19¹/₈" stainless steel tray
- 3" double ball bearing swivel casters



P-5091

Large Treatment Cabinet

Overall Size

28"W x 18"D x 33"H

Top Drawers

211/4"W x 16"D x 31/4"H

Bottom Drawer

211/4"W x 16"D x 53/8"H


features

- Solid stainless steel retaining rail
- Internal shelf for optimal storage
- Optional locking rod
- 2" double ball bearing swivel casters



stretcher series basic transport stretcher

The P-172 Series general transport stretcher provides an economical patient transport solution. This non-hydraulic stretcher series features a 13/8" heavygauge O.D. tubular frame, continuous rubber bumper, long-life, double ball bearing, 8" swivel casters for quiet movement, and convenient hand holds on each corner.




RAIL SYSTEM

Easy to wipe clean and disinfect side rails.



FOWLER HEAD REST

Fowler provides additional assistance for the safe and easy raising and lowering of the patient.



CASTERS







I.V. Pole Storage Tube Location

STANDARD FEATURES

- 350 lbs. weight capacity
- Designed as a cost efficient transport stretcher
- Four Brake & Steer Casters
- Heavy-gauge, 13/8" O.D. tubular frame
- Fixed litter top height
- Full perimeter bumper
- Convenient hand holds on each corner
- Long-life polyurethane, double ball bearing, 8" swivel casters for quiet movement
- Latex-free



SPECIFICATIONS

| Model Number | P-172 |
|---|-----------------------------|
| Weight Capacity | 350 lbs. (159 kg) |
| Overall Length Overall Width | 78" (198 cm) 28" (71 cm) |
| Fixed Height | 331/4" (85 cm) |
| Optional Litter Positioning Fowler Backrest | 3°, 12°, 26°, 38°, 44° |
| Patient Surface | 77" x 26" (196 x 66 cm) |
| Optional Side Rails | 12" x 43" (30 x 109 cm) |
| Casters | 8" (20 cm) |
| Warranty | 1 year parts and labor |

P-172 CONFIGURATIONS

| | Swivel Caster | Brake & Steer Caster | P-170-1 Shelf | P-170-2 Rails | P-170-3 Fowler | P-170-4 IV Pole | P-170-5 Strap | P-170-6 Bumpers | P-170-8 Mattress | P-170-9 O ₂ Tank Holder |
|---------|------------------|-------------------------|------------------|------------------|-------------------|--------------------|------------------|--------------------|---------------------|---------------------------------------|
| P-172 | | 4 | | | | | | | | |
| P-172-C | | 4 | • | • | • | • | • | | • | • |

OPTIONS


| Accessory | | Accessory | | Accessory |
|-----------------------------------|---------|---|---------|--|
| Storage Shelf: Shelf | P-170-1 | IV Pole: Fixed Height | P-170-4 | Mattress: Pad (2½" thick black). P-170-8 |
| Side Rail: Stainless Steel | P-170-2 | Restraint Strap: Velcro | P-170-5 | O ₂ Holder: E Size Tank Holder P-170-9 |
| Fowler: Stainless SteelP-170-3 | | Rolling Bumpers: 7½" round rubber P-170-6 | | (requires storage shelf P-170-1) |




MATTRESS PAD Soft-vinyl 2½" thick black mattress pad measures 26"W x 77"L.




O₂ HOLDER
Bracket for E-size oxygen tank. Requires lower shelf.



Two hook pole includes holder and storage tube.



FOWLER HEAD RESTStainless steel construction with an adjustable range from 0° - 45°.



LOWER SHELFStainless steel storage shelf.



RESTRAINT STRAPBlue Velcro restraint strap.



CASTERS 8" double ball bearing casters.



BUMPERS 7½" rolling rubber bumpers



catalog 2025

