



P-2010-S

OVERALL SIZE

16.25"W x 26"D x 21"H

COMPARTMENT SIZE

- 2.3 cubic ft.
- 13.25"W x 21"D x 14"H

- Temp Range:
 - Blankets: 90°F - 200°F
- No fans or lint traps
- Caster (Option)

warming cabinets

blanket

features

Blanket warmers P-2010-S, P-2012, P-2022, 2028 and P-2032 feature a LED display, window doors, and control lock programming.

WarmSafe™
technology



P-2012

OVERALL SIZE

18.5"W x 22.75"D x 22"H

COMPARTMENT SIZE

- 2.5 cubic ft.
- 15.5"W x 18.5"D x 15.25"H

- Temp Range:
 - Blanket: 90°F - 160°F
- No fans or lint traps
- Caster (Option)

heated center shelf



P-2022

OVERALL SIZE

18.5"W x 22.75"D x 28"H

COMPARTMENT SIZE

- 3.5 cubic ft.
 - 15.5"W x 18.5"D x 21.25"H*
- *(10.25"H above and below the center shelf)

- Temp Range:
 - Blanket: 90°F - 160°F
- No fans or lint traps
- Caster (Option)



P-2028

OVERALL SIZE

- 24"W x 25"D x 22"H

COMPARTMENT SIZE

- 4 cubic ft.
- 121"W x 21"D x 15.25"H*

- Temp Range:
 - Blankets: 90°F - 160°F
- No fans or lint traps
- Caster (Option)

shown with left door hinge mount option



P-2032

OVERALL SIZE

24"W x 25"D x 35"H

COMPARTMENT SIZE

- 7.5 cubic ft.
 - 21"W x 21"D x 28.25"H*
- *(13.18"H above and below the center shelf)

- Temp Range:
 - Blanket: 90°F - 160°F
- No fans or lint traps
- Caster (Option)

P-2055

OVERALL SIZE

32.25"W x 31"D x 70.75"H

COMPARTMENT SIZE

- 20.6 cubic ft.
- 26.5"W x 23.25"D x 56.75"H

- Temp Range:
 - Blankets: 90°F - 160°F
- Total Capacity:
60-70 blankets
- One compartment, two separate doors
- Circulation fan for even temperature
- 5" casters
- Feet (Option)



warming cabinets

blanket

features

Blanket warmers feature windowed door, programmable control with temperature lock and four digit LED display and single pane energy efficient coated glass window door allows inventory observation.

WarmSafe™
technology

Heated center shelf



P-2210

OVERALL SIZE

• 18.5"W x 22.75"D x 22"H

COMPARTMENT SIZE

- 2.5 cubic ft.
- 15.5"W x 18.5"D x 15.25"H

- Temp Range:
 - Blankets: 90°F - 160°F
- A warming shut-off system, separate from the electronic control, prevents overheating
- Interior blue lighting
- No fans or lint traps
- Caster (Option)



P-2220

OVERALL SIZE

• 18.5"W x 22.75"D x 28"H

COMPARTMENT SIZE

- 3.5 cubic ft.
- 15.5"W x 18.5"D x 21.25"H*
* (10.25"H above & below the center shelf)

- Temp Range:
 - Blankets: 90°F - 160°F
- A warming shut-off system, separate from the electronic control, prevents overheating
- Interior blue lighting
- No fans or lint traps
- Caster (Option)



P-2230

OVERALL SIZE

• 24"W x 25"D x 22"H

COMPARTMENT SIZE

- 4 cubic ft.
- 21"W x 21"D x 15.25"H

- Temp Range:
 - Blankets: 90°F - 160°F
- A warming shut-off system, separate from the electronic control, prevents overheating
- Interior blue lighting
- No fans or lint traps
- Caster (Option)

Heated center shelf



P-2240

OVERALL SIZE

• 24"W x 25"D x 35"H

COMPARTMENT SIZE

- 7.5 cubic ft.
- 21"W x 21"D x 28.25"H*
* (13.75"H above & below the center shelf)

- Temp Range:
 - Blankets: 90°F - 160°F
- A warming shut-off system, separate from the electronic control, prevents overheating
- Interior blue lighting
- No fans or lint traps
- Caster (Option)

P-2040

OVERALL SIZE *(without bumper)*

22.5"W x 34.25"D x 72.5"H

COMPARTMENT SIZE

- 7.7 cubic ft. upper
- 19"W x 26.25"D x 26.75"H
- 7.7 cubic ft. lower
- 19"W x 26.25"D x 26.75"H

- **Temp Range:**
 - Blankets: 90°F - 160°F
 - Irrigation: 90°F - 150°F
- **Total Capacity:**
 - 60 1-liter bottles
 - 40-50 blankets
- Two compartments, each with individual controls
- No fans or lint traps
- 5" casters
- **Bumper (Option)**
(25.5"W x 33.75"D)



P-2040

shown with
bumper option

warming cabinets

blanket & fluid

features

Combination fluid and blanket warmers feature LED display, window doors, and control lock programming.

- Two compartments, each with individual controls

P-2147

OVERALL SIZE

- 30"W x 26.75"D x 74.75"H
(caster standard)
- 30"W x 26.75"D x 69"H
(feet - option)

COMPARTMENT SIZE

- 5.5 cu. ft. fluid compartment
- 26.5"W x 23.5"D x 15"H
- 13 cu. ft. blanket compartment
- 26.5"W x 23.5"D x 36"H

- **tri▼mode Range:**
 - Blankets: 90°F - 160°F
 - Irrigation: 90°F - 150°F
 - Injection: 90°F - 104°F
- **Total Capacity:**
 - 24 1-liter bags
 - 30 1-liter bottles
 - 10-14 blankets (upper chamber)
 - 30-40 blankets (lower chamber)
- Separate temperature controls for each compartment
(**tri▼mode** top chamber only)
- Two compartments with two separate doors
- 5" casters



P-2150

OVERALL SIZE

- 30"W x 19.25"D x 75"H

COMPARTMENT SIZE

- 3.9 cu. ft. fluid compartment
- 26.5"W x 17"D x 15"H
- 9.4 cu. ft. blanket compartment
- 26.5"W x 17"D x 36"H

- **tri▼mode Range:**
 - Blankets: 90°F - 160°F
 - Irrigation: 90°F - 150°F
 - Injection: 90°F - 104°F
- **Total Capacity:**
 - 20 1-liter bags
 - 24 1-liter bottles
 - 9-12 blankets (upper chamber)
 - 24-30 blankets (lower chamber)
- Separate temperature controls for each compartment
(**tri▼mode** top chamber only)
- Two compartments with two separate doors
- Pass Through (Option)

tri▼mode



P-2420

OVERALL SIZE

30"W x 21.25"D x 25.25"H

COMPARTMENT SIZE

- 4.75 cubic ft.
- 26.5"W x 17"D x 18.25"H

• **tri▼mode Range:**

- Irrigation: 90°F - 150°F
- Injection: 90°F - 104°F
- Blanket: 90°F - 160°F

• **Total Capacity:**

- 20 1-liter bags or
- 24 1-liter bottles
- 14 - 18 blankets

• **Caster (Option)**

tri▼mode



P-2430

OVERALL SIZE

30"W x 27"D x 25.25"H

COMPARTMENT SIZE

- 5.5 cubic ft.
- 26.5"W x 19.75"D x 18.25"H

• **tri▼mode Range:**

- Irrigation: 90°F - 150°F
- Injection: 90°F - 104°F
- Blanket: 90°F - 160°F

• **Total Capacity:**

- 48 1-liter bags or
- 30 1-liter bottles
- 16 - 20 blankets

• **Caster (Option)**

warming cabinets

tri▼mode

features

Combination/tri▼mode warmers incorporate the use of a circulation fan to evenly distribute the warmed air to achieve and maintain accurate set-point temperatures. Pedigo tri▼mode warmers have an accuracy of +0/-2°F for injection fluids and an accuracy of +0/-3°F for irrigation fluids.

Combination warmers feature tri▼mode chamber allowing for 3 different modes of warming, LED display, window doors, and control lock programming.

tri▼mode



P-2112

OVERALL SIZE

18.5W x 22.75"D x 22"H

COMPARTMENT SIZE

- 2.5 cubic ft.
- 15.5"W x 19"D x 15"H

• **Temp Range:**

- Irrigation: 90°F - 150°F
- Injection: 90°F - 104°F
- Blanket: 90°F - 160°F

• **Total Capacity:**

- 16 1-liter bags or
- 12 1-liter bottles

• **Glide out basket**

• **Caster (option)**

tri▼mode



P-2122

OVERALL SIZE

18.5"W x 22.75"D x 28"H

COMPARTMENT SIZE

- 3.5 cubic ft.
- 15.5"W x 19"D x 21"H

• **Temp Range:**

- Irrigation: 90°F - 150°F
- Injection: 90°F - 104°F
- Blanket: 90°F - 160°F

• **Total Capacity:**

- 24 1-liter bags or
- 24 1-liter bottles

• **Glide out basket**

• **Caster (option)**

tri▼mode



P-2250

OVERALL SIZE

18.5W x 22.75"D x 22"H

COMPARTMENT SIZE

- 2.5 cubic ft.
- 15.5"W x 19"D x 15"H

• **Temp Range:**

- Irrigation: 90°F - 150°F
- Injection: 90°F - 104°F
- Blanket: 90°F - 160°F

• **Total Capacity:**

- 16 1-liter bags or
- 12 1-liter bottles

• **Glide out basket**

• **Caster (option)**

P-2010-TC

OVERALL SIZE

23.25"W x 35"D x 43"H

features

- Stainless steel
- 4" casters with brake & swivel lock
- 300 lbs. total weight capacity at 100 lbs. per shelf
- Shelf Dimensions
17.5"W x 27.5"D x 12.25"H
- Compatible with the P-2010-S warming cabinet



shown with the
P-2010-S warmer

warming cabinets

transfer carts

features

The P-2010-TC is designed with an ergonomic push/pull handle for ease of transport as well as safely containing the warming cabinet.

Two lower shelves allow for convenient storage of blankets. All four casters are high-end Total-Lock casters.

P-2030-TC

OVERALL SIZE

26"W x 33"D x 28"H

features

- Stainless steel
- 4" stainless steel casters with brakes
- 400 lbs. total weight capacity at 200 lbs. per shelf
- Top shelf
- Bottom shelf with 4-sided rail.
- Shelves: 24"W x 31"D x 15"H
- Compatible with all countertop warming cabinets



features

The P-2030-TC is compatible with all countertop warming cabinets.

Lower shelf allows for convenient storage of blankets. All four casters are high-end Total-Lock casters.



Modular Configuration

Wall mount:

One to three (1-3) bag capacity

Countertop:

One to three (1-3) bag capacity

Pole mount:

One to three (1-3) bag capacity

Temperature:

- Heats to 104°F (40°C) in 30 minutes or less
(slightly longer heating time is required for 3L bags)
- Accuracy of +0°/-2°C (+0°/-3°F)

Electronic Control

Monitors the length of time the bag has been held at temperature, displayed additionally by a status button. The control alerts users when a fluid bag has been held at temperature longer than 14 days.

** All units have universal IEC 320 C14 power input, 120/220/230VAC*

Warranty

1 year parts and labor



ivNow-1

P-2301-A

Capacity

One bag, up to 3ℓ

13.25"W x 8"D x 7.25"H



ivNow-2

P-2302-A

Capacity

Two bags, up to 3ℓ

13.25"W x 8"D x 14.25"H



ivNow-3

P-2303-A

Capacity

Three bags, up to 3ℓ

13.25"W x 8"D x 21.25"H

ivNow®


individual warming pods

features

The ivNow® fluid warmer quickly warms and maintains the temperature of injection/intravenous and irrigation solutions prior to their use. The specially contoured warming module cradles solution bags in 0.5, 1, 2, and 3-liter sizes.

ivNow® units can be customized in the field by stacking or removing pods from the configuration. Units can be placed on countertops for use, wall mounted, or equipment pole stand (requires pole clamp).

* Seismic wall mounting bracket available as option.

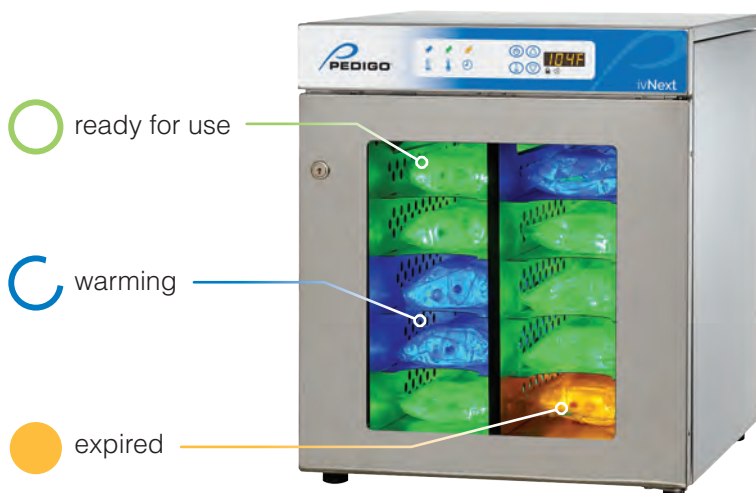

WarmSafe™
Technology

ivNext®

P-2300



ivNext®

Intelligent fluid warming and IV inventory staging system.

- Know when an IV bag has reached the recommended set point temperature (adjustable injection mode)
- Color-coded lighting indicates bag readiness or expiration.
- Organized inventory allows for faster retrieval of fluids.
- Overall Size:** 18.5"W x 22.75"D x 22"H
- Capacity:** 2.5 cubic ft. | 10 1-liter bags