




RCC-242-B

Overall outside dimensions:
46¼"W x 27½"D x 42½"H

Usable Interior Space
37¼"W x 23¾"D x 27¾"H

Double door, with scratch and impact resistant clear polycarbonate windows; glass-filled polymer push handles on each end; CartStat biohazard indicator wheel; re • volve™ 6" diameter, maintenance-free, high-temp, engineered thermoplastic casters, two direction and two total lock casters.

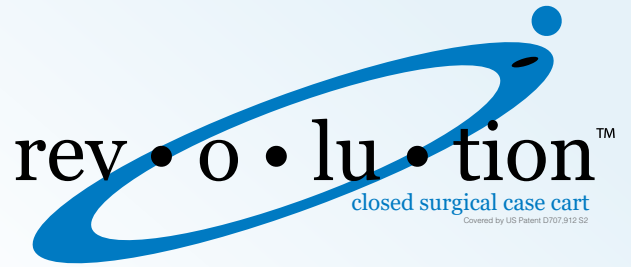

The **rev•o•lu•tion™** closed case cart is ergonomically designed to be lightweight and easy to handle, requiring less push/pull force than standard case carts.

Design

- Integrated body, floor and doors increases overall cart rigidity.
- Overall weight of cart reduced.
- Inside floor is sloped 1½° to the rear of cart to contain fluids.
- High temp, impact resistant bumper is mounted directly to the cart body to reduce overall footprint.
- Roll-out shelves with two position latch mechanism safely locks the shelf in or out.
- Cart is designed to quickly drain during cart washing to minimize residual water.



Biohazard Indicator Wheel
CartStat

Adjustable Door Hinge
For proper alignment.



Waterfall Wire Shelf



2 Total Lock Caster



Floor Sloped Toward Rear
1½° slope for containment of fluid.



re • volve™ caster



RCC-233-B

Overall outside dimensions:
29"W x 27½"D x 58½"H

Usable Interior Space
20"W x 23¾"D x 44¾"H

Single door, with scratch and impact resistant clear polycarbonate windows; glass-filled polymer push handles on each end; CartStat biohazard indicator wheel; re • volve™ 6" diameter, maintenance-free, high-temp, engineered thermoplastic casters, two direction and two total lock casters.

RCC-235-B

Overall outside dimensions:
36"W x 27½"D x 58½"H

Usable Interior Space
27"W x 23¾"D x 44¾"H

Double door, with scratch and impact resistant clear polycarbonate windows; glass-filled polymer push handles on each end; CartStat biohazard indicator wheel; re • volve™ 6" diameter, maintenance-free, high-temp, engineered thermoplastic casters, two direction and two total lock casters.

RCC-245-B

Overall outside dimensions:
46¼"W x 27½"D x 58½"H

Usable Interior Space
37¼"W x 23¾"D x 44¾"H

Double door, with scratch and impact resistant clear polycarbonate windows; glass-filled polymer push handles on each end; CartStat biohazard indication wheel; re • volve™ 6" diameter, maintenance-free, high-temp, engineered thermoplastic casters, two direction and two total lock casters.

RCC-256-MS-B

Overall outside dimensions:
29"W x 27½"D x 41½"H

Usable Interior Space
20"W x 23¾"D x 27¾"H

Single door, with scratch and impact resistant clear polycarbonate window; glass-filled polymer push handles on each end; CartStat biohazard indicator wheel; re • volve™ 6" diameter, maintenance-free, high-temp, engineered thermoplastic casters, two direction and two total lock casters.

Shelving Configurations

RCC-233-WS..... Wire shelf, for RCC-233-B and RCC-256-MS-B.

RCC-233-SS..... Solid shelf, for RCC-233-B and RCC-256-MS-B.

RCC-233-WSRO .. Roll-out wire shelf, with (2) position spring loaded shelf lock. Shelf locks in storage and fully extended position for RCC-233-B and RCC-256-MS-B.

RCC-233-SSRO ... Roll-out solid shelf, with (2) position spring loaded shelf lock. Shelf locks in storage and fully extended position for RCC-233-B and RCC-256-MS-B.

RCC-235-WS..... Wire shelf, for RCC-235-B.

RCC-235-SS..... Solid shelf, for RCC-235-B.

RCC-235-WSRO .. Roll-out wire shelf, with (2) position spring loaded shelf lock. Shelf locks in storage and fully extended position, for RCC-235-B.

RCC-235-SSRO ... Roll-out solid shelf, with (2) position spring loaded shelf lock. Shelf locks in storage and fully extended position, for RCC-235-B.

RCC-242-WS..... Wire shelf, for RCC-242-B and RCC-245-B.

RCC-242-SS..... Solid shelf, for RCC-242-B and RCC-245-B.

RCC-242-WSRO .. Roll-out wire shelf, with (2) position spring loaded shelf lock. Shelf locks in storage and fully extended position, for RCC-242-B and RCC-245-B.

RCC-242-SSRO ... Roll-out solid shelf, with (2) position spring loaded shelf lock. Shelf locks in storage and fully extended position, for RCC-242-B and RCC-245-B.